

**VDK-LOK**

**V15 Series**

Rev. 01-01  
Aug. 2023

## Integral Bonnet Needle Valves For regulating and shut-off

### Stem


Hard chrome plated stem threads assures extended service life

### Choice of Fluid Control

- Metal to metal Vee & Regulating stems for elevated temperatures
- Repetitive soft seat for gas leak-tight

### Variety of end connections

- Reliable DK-Lok Tube Fitting Ends
- NPT & ISO Male & Female

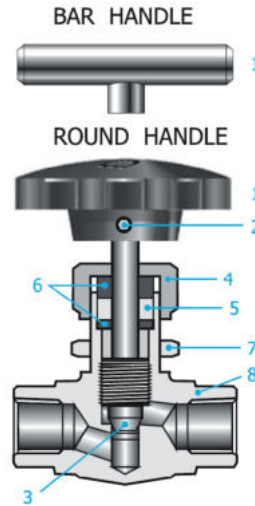

### Positive Driven Handle

Choice of Round handle and Bar handle

### Packing Nut

Allows external adjustments of packing

### Panel Nut

Allows panel installation

### Integral Bonnet Design

To eliminate inadvertent stem back-out

### Packing

- Low operating torque.
- Standard PTFE
- Optional Chevron PEEK for high temperature

## Materials of Construction

| Components          | VALVE BODY MATERIALS<br>Material Grade/ASTM Specification |            |                  |
|---------------------|---|------------|------------------|
|                     | SS316   | BRASS      | ALLOY 400        |
| 1 Round handle      | Nylon with brass insert                                   |            |                  |
| 1 Bar handle        | SS316/A276  |            |                  |
| 2 Set Screw         | SS304/A276  |            |                  |
| 3 Standard Vee Stem | SS316/A276<br>Hard Chrome-plated on stem tip and threads  |            | Alloy R-405      |
|                     | SS316/A276<br>Hard Chrome-plated on threads               |            |                  |
|                     | Optional Soft Seat Stem                                   |            |                  |
| 4 Packing Nut       | SS316/A276  | Brass/B16  | Alloy R-405/B164 |
| 5 Packing           | Standard PTFE, Optional PEEK                              |            |                  |
| 6 Packing Gland     | SS316/A276  | Brass/B16  | Alloy R-405/B164 |
| 7 Panel Nut         | SS316/A276  | Brass/B16  | SS316/A276       |
| 8 Body              | SS316/A182  | Brass/B283 | Alloy 400/B564   |

Wetted parts and lubricant are listed in blue.

**Lubrication** : Molybdenum disulfide with hydrocarbon coating

## Design

- Designed for a wide range of general purpose in gas and liquid applications
- Forged Body with Inline and Angle pattern
- Integral Bonnet design to eliminate inadvertent stem back-out
- Standard metal seal for pressure tightness at elevated temperatures
- Standard PTFE packing, and optional PEEK packing for higher temperature service
- Packing nut allows external packing adjustment to ensure leak-free packing on stem
- Broad choices of end connections include reliable DK-Lok, NPT & ISO Male & Female pipe threads

## Operation


- Pressure rating up to 5,000psig (345bar) @100°F (38°C)
- Temperature rating up to 450°F (232°C) with standard PTFE packing; up to 600°F (315°C) with optional PEEK packing
- Panel mounting without packing disruption
- Standard SS316 and Brass material valve construction
- DK-Lok Gap gauge allows easy inspection for sufficient tube pull-up before a system is pressurized
- Valves for Sour Gas Service meeting the requirements of NACE MR0175 are available

## Factory Test

Every valve is tested with the nitrogen @1,000psig (68bar) for leakage at the seat to a maximum allowable leak rate of 0.1 SCCM. The packing is tested for no detectable leakage.

## Panel mounting

How to mount the valve on panel.



Panel Nut

| Valve Series | Panel Hole Drill | Panel Thickness |                |
|--------------|------------------|-----------------|----------------|
|              |                  | mm(in)          |                |
|              |                  | Min.            | Max.           |
| V15A         | 13.5 (0.53)      | 3.17<br>(0.125) | 6.35<br>(0.25) |
| V15B         | 13.5 (0.53)      |                 |                |
| V15C         | 20.0 (0.79)      |                 |                |
| V15D         | 26.2 (1.03)      |                 |                |

2. Remove the packing nut & panel nut and set aside for later use.
3. Place the valve bonnet in the panel hole.

### Reassembly

4. Tighten the panel nut onto the valve bonnet.
  - Keep the panel nut always on the external portion of the panel.
5. Finger tighten the packing nut onto the valve body.
6. Place the round handle on the stem. Align the set screw with the groove on the side of the stem. Tighten the set screw.
7. Fully close the valve and retract the stem two or three turns before torque the packing nut to the torque below.
  - Packing Nut Torque Table




| Valve Series | Torque |        |
|--------------|--------|--------|
|              | lbf·ft | kgf·cm |
| V15A & V15B  | 5.2    | 71.9   |
| V15C         | 10.6   | 146.6  |
| V15D         | 25.1   | 347    |

### Disassembly

1. Un-tighten the handle set screw using an allen key and remove the handle.
  - Handle Set Screw Allen Key

| Valve Series | Allen Key    |            |
|--------------|--------------|------------|
|              | Round Handle | Bar Handle |
| V15A & V15B  | Hex.2.5mm    | Hex. 4.0mm |
| V15C         | Hex.3.0mm    |            |
| V15D         |              | Hex. 5.0mm |

## Choice of Stem Tip

| Vee Stem  | Regulating Stem   | Non-Rotating Soft Seat   |
|---|---|--|
|  |  |                                       |
| <p>Metal to metal Vee stem for pressure tightness at elevated temperature.</p>      | <p>Regulating stem for flow rate control</p>  | <p>Non-rotating PCTFE soft seat for repetitive shut-off on gas.<br/>• Round Handle is recommended for soft seat valve.</p> |

**Note :** Soft seat packing adjustment may be required during service to compensate the physical compression of soft seat after repeated shut-off.

## Ordering Information and Table of Dimensions



Unit : mm (in.)

| Valve Basic Ordering Number | End Connections |                         | Orifice        | Cv         | Dimensions   |          |          |             |            |               |                |              |              |                 |            |            |          |
|-----------------------------|-----------------|-------------------------|----------------|------------|--------------|----------|----------|-------------|------------|---------------|----------------|--------------|--------------|-----------------|------------|------------|----------|
|                             | Inlet           | Outlet                  |                |            | A            | B        | L        | L1          | L2         | E             | D              | H            | H1           |                 |            |            |          |
| V15A                        | F-2N-           | 1/8" Female NPT         | 2.0<br>(0.08)  | 0.09       | 60<br>(2.36) | 21(0.83) | 42(1.65) | 21(0.83)    |            | 9.5<br>(0.37) | 11<br>(0.43)   | 36<br>(1.42) | 32<br>(1.26) |                 |            |            |          |
|                             | M-2N-           | 1/8" Male NPT           |                |            |              |          |          | 20(0.79)    |            |               |                |              |              |                 |            |            |          |
|                             | MD-2N2T         | 1/8" Male NPT           |                |            |              |          |          | 1/8" DK-Lok | 26(1.02)   |               |                |              |              |                 |            |            |          |
|                             | D-2T-           | 1/8" DK-Lok             |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
|                             | D-3M-           | 3mm DK-Lok              |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
| V15B                        | F-2N-           | 1/8" Female NPT         | 4.3<br>(0.17)  | 0.37       | 60<br>(2.36) | 21(0.83) | 42(1.65) | 21(0.83)    |            | 9.5<br>(0.37) | 11<br>(0.43)   | 36<br>(1.42) | 45<br>(1.77) |                 |            |            |          |
|                             | M-2N-           | 1/8" Male NPT           |                |            |              |          |          | 25(0.98)    | 25(0.98)   |               |                |              |              |                 |            |            |          |
|                             | M-4N-           | 1/4" Male NPT           |                |            |              |          |          | 50(1.97)    | 50(1.97)   |               |                |              |              |                 |            |            |          |
|                             | MD-4N4T-        | 1/4" Male NPT           |                |            |              |          |          | 1/4" DK-Lok | 54(2.13)   |               |                |              |              | 28.8(1.13)      |            |            |          |
|                             | D-6M-           | 6mm DK-Lok              |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
| V15C                        | D-4T-           | 1/4" DK-Lok             | 6.4<br>(0.252) | 0.73       | 71<br>(2.80) | 29(1.14) | 58(2.28) | 29(1.14)    | 33.2(1.31) | 13<br>(0.51)  | 13.5<br>(0.53) | 50<br>(1.97) | 64<br>(2.52) |                 |            |            |          |
|                             | D-8M-           | 8mm DK-Lok              |                |            |              |          |          |             |            |               |                |              |              | 30(1.18)        | 59.2(2.33) | 29.6(1.16) |          |
|                             | F-4N-           | 1/4" Female NPT         |                |            |              |          |          |             |            |               |                |              |              | 28(1.10)        | 56(2.20)   | 28(1.10)   | 28(1.10) |
|                             | F-4R-           | 1/4" Female ISO Tapered |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
|                             | MF-4N-          | 1/4" Male NPT           |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
|                             | MD-4N6T-        | 1/4" Male NPT           |                |            |              |          |          |             |            |               |                |              |              | 3/8" DK-Lok     | 61.2(2.41) | 33.2(1.31) |          |
|                             | M-6N-           | 3/8" Male NPT           |                |            |              |          |          |             |            |               |                |              |              | 58(2.28)        | 29(1.14)   | 33.2(1.31) |          |
|                             | MD-6N6T-        | 3/8" Male NPT           |                |            |              |          |          |             |            |               |                |              |              | 3/8" DK-Lok     | 62.2(2.45) | 36(1.42)   |          |
|                             | MD-6N8T-        | 3/8" Male NPT           |                |            |              |          |          |             |            |               |                |              |              | 1/2" DK-Lok     | 65(2.56)   | 36(1.42)   |          |
| D-10M-                      | 10mm DK-Lok     | 33(1.30)                | 66(2.60)       | 33.2(1.31) | 33.2(1.31)   |          |          |             |            |               |                |              |              |                 |            |            |          |
| D-6T-                       | 3/8" DK-Lok     | 36(1.42)                | 72(2.83)       | 36(1.42)   | 36(1.42)     |          |          |             |            |               |                |              |              |                 |            |            |          |
| V15D                        | D-12M-          | 12mm DK-Lok             | 9.5<br>(0.374) | 1.80       | 99<br>(3.90) | 38(1.50) | 76(2.99) | 38(1.50)    | 38(1.50)   | 19<br>(0.75)  | 19<br>(0.75)   | 66<br>(2.60) | 76<br>(3.00) |                 |            |            |          |
|                             | D-8T-           | 1/2" DK-Lok             |                |            |              |          |          |             |            |               |                |              |              | 49(1.93)        | 97(3.82)   | 48.5(1.91) |          |
|                             | F-6N-           | 3/8" Female NPT         |                |            |              |          |          |             |            |               |                |              |              | 48.5(1.91)      | 76(2.99)   | 38(1.50)   | 38(1.50) |
|                             | F-6R-           | 3/8" Female ISO Tapered |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
|                             | F-8N-           | 1/2" Female NPT         |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
|                             | F-8R-           | 1/2" Female ISO Tapered |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
|                             | M-8N-           | 1/2" Male NPT           |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
|                             | MF-8N-          | 1/2" Male NPT           |                |            |              |          |          |             |            |               |                |              |              | 1/2" Female NPT |            |            |          |
| D-8T-                       | 1/2" DK-Lok     |                         |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |
| D-12T-                      | 3/4" DK-Lok     |                         |                |            |              |          |          |             |            |               |                |              |              |                 |            |            |          |

All dimensions shown are for reference only and are subject to change. Dimensions with DK-Lok nuts are in finger-tight position.

Patterns : To order angle pattern, use -A as a suffix to the valve ordering number. Example: V15A-F-2N-A

### Table 1. Pressure-Temperature Ratings for valves with standard PTFE packing

Pressure rating of valves with PCTFE soft seat is limited to 200°F (93°C).

| ASME Material Group    | TABLE 2-2.2   |       |      |       | N/A   |       | TABLE 2-3.4 |     |
|------------------------|---------------|-------|------|-------|-------|-------|-------------|-----|
|                        | SS316         |       |      |       | Brass |       | Alloy 400   |     |
| ASME Class Rating      | 2,080         |       |      |       | N/A   |       | 1,500       |     |
| Temperature @ pressure | psig          | bar   | psig | bar   | psig  | bar   | psig        | bar |
| -65°F (-54°C) to       | 100°F (38°C)  | 5,000 | 345  | 3,000 | 207   | 3,000 | 207         |     |
|                        | 200°F (93°C)  | 4,293 | 296  | 2,353 | 162   | 2,640 | 182         |     |
|                        | 300°F (148°C) | 3,877 | 267  | 2,059 | 142   | 2,470 | 170         |     |
|                        | 350°F (176°C) | 3,719 | 256  | 1,471 | 101   | 2,430 | 167         |     |
|                        | 400°F (204°C) | 3,562 | 246  | 392   | 27    | 2,390 | 165         |     |
|                        | 450°F (232°C) | 3,437 | 237  | -     | -     | 2,380 | 164         |     |



**Note :** Pressure rating of valve may be limited to the working pressure of pipe ends and the tubing connected.

Refer to DK-Lok Tube Fitting catalog for the details of working pressures in various tubing sizes, materials and wall thickness.

**Table 2. Pressure-Temperature Ratings for valves with optional PEEK packing**

| Valve Material | Packing | Stem                                 | Pressure –Temperature Rating °F (°C)           |
|----------------|---------|--------------------------------------|--|
| SS316          | PEEK    | Metal to metal<br>(Vee & Regulating) | -65 to 600 (-54 to 315) @ 3,130 psig (215 bar) |
| Brass          |         |                                      | -65 to 400 (-54 to 204) @ 3,000 psig (207 bar) |
| Alloy 400      |         |                                      | -65 to 500 (-54 to 260) @ 2,370 psig (163 bar) |

**Flow Curves**

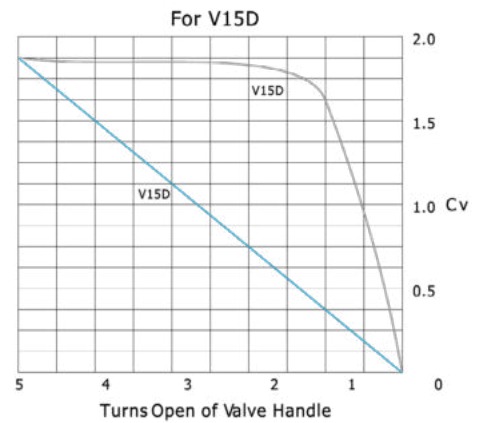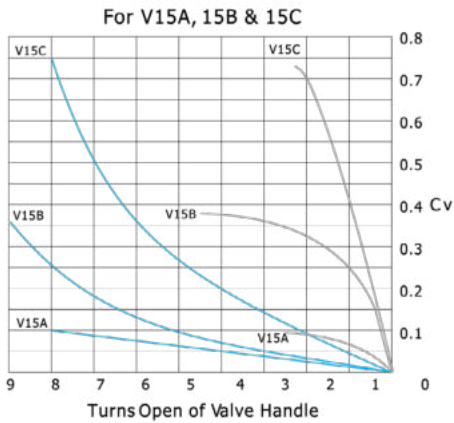

**How to order**

Select applicable Valve Pattern, Stem type, Handle and Body material from designators listed below.

V15B-F-2N  
V15B-F-2N

| Valve Pattern   | Stem Packing Designator                                | Stem Designator  | Handle Designator   | Body Material Designator  |
|---|--|--|---|---|
| <p><b>Nil</b> : Inline pattern<br/><b>A</b> : Angle pattern</p>   | <p><b>Nil</b> : Standard PTFE<br/><b>PK</b> : PEEK</p> | <p><b>Nil</b> : Standard Vee stem tip<br/><b>R</b> : Regulating tip<br/><b>K</b> : PCTFE (Kel-F) soft seat</p> | <p><b>Nil</b> : Nylon Round Handle<br/><b>BH</b> : Bar Handle</p> | <p><b>S</b> : SS316<br/><b>B</b> : Brass<br/><b>M</b> : Alloy 400</p> |
| <p><b>Handle for Soft Seat</b><br/>Nylon Round Handle is recommended for soft seat valve. This helps prevent the soft seat from damage.</p> |  |  |   |   |

**We reserve the right to change specifications stated in this catalog for our continuing program of improvement.**

**Safe Valve Selection**

The selection of a valve for any application or system design must be considered to ensure safe performance. Valve function, Valve rating, material compatibility, proper installation, operation and maintenance remain the sole responsibility of the system designer and the user. DK-Lok accepts no liability for any improper selection, installation, operation or maintenance.



경상남도 김해시 주촌면 골든루트로 129번길 7 50969

7, Golden root-ro 129beon-gil, Juchon-myeon, Gimhae-si, Gyeongsangnam-do, South Korea. 50969

Tel. +82-55-338-0114 Fax. +82-55-901-0141 [www.dklok.com](http://www.dklok.com)

---


**VDK-LOK**

**V16, VH16 Series**


Rev. 01-01  
Aug. 2023

## Features

- Pressure up to 10,000 psig (689 bar) @ 100°F (38°C).
- Temperature Rating up to 449°F (232°C) with standard PTFE packing; up to 1,200°F (648°C) with Grafoil packing.
- Standard 316 stainless steel, optional Alloy 400, and Alloy C276 construction.
- Valve stem back seating against the bevelled edge of bonnet in fully open position prevents maximum leakage through bonnet when packing fails.
- Standard non-rotating stem disc and stem packing below the threads design.



- **Handle**- Standard Stainless Steel formed handle, optional aluminum bar handle.
- **External Packing Bolt**- allows packing adjustment without the valve disassembly.
- **Roll threaded and hard chrome plated stem**- is for long valve life.
- **Panel Mounting Nut**- is standard and permits valve to panel or actuator.
- **Union Nut**- prevents accidental disassembly of the valve in service.
- **Stem Packing below the threads**- prevents media contamination and thread lubricant washout.
- **Stem Back Seating**- in fully open position.
- **Non-Rotating Stem Disc at Closure**- is for maximum metal seat life and positive seal.

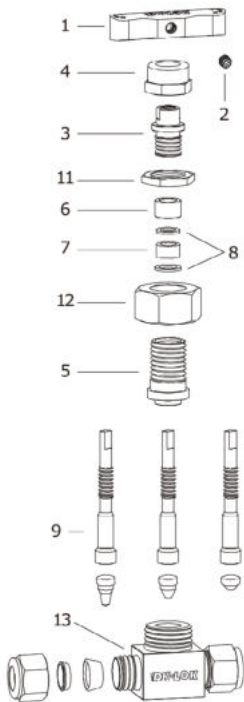

## Materials of Construction

| Component   | Valve Body Materials  |                |            |
|---|---|----------------|------------|
|   | SS316   | Alloy 400      | Alloy C276 |
|   | Material Grade/ASTM Specification   |                |            |
| 1. Bar handle   | Stainless Steel for V16, SS316 / A276 for VH16, optional anodized aluminum handle |                |            |
| 2. Set screw  | SS304   |                |            |
| 3. Packing bolt   | SS316 / A276 or A479  |                |            |
| 4. Cap nut  | SS316 / A276 or A479  |                |            |
| 5. Bonnet   | SS316 / A276 or A479  | Alloy 400/B164 | C276/B574  |
| 6. Gland  | SS316 / A276 or A479  | Alloy 400/B164 | C276/B574  |
| 7. Packing(2)   | PTFE/D1710, optional PEEK & Grafoil   |                |            |
| 8. Packing supports (2)   | SS316 / A276 or A479  | Alloy 400/B164 | C276/B574  |
| 9. Stem   | Hard Chrome-plated<br>SS316 / A276 or A479  | Alloy 400/B164 | C276/B574  |
| 10. Standard globe disc, optional globe ball & regulating disc. | TYPE630/A564  | Alloy 400/B164 | C276/B574  |
| 11. Panel nut   | SS316   |                |            |
| 12. Union nut   | SS316 / A276 or A479  |                |            |
| 13. Body  | SS316 / A276 or A479  | Alloy 400/B164 | C276/B574  |


Wetted parts and lubricants are listed in blue.

- Lubrication** : • Nickel anti-seize lubricant (hydrocarbon carrier).  
• Ball disc: hydrocarbon-based.

## Technical Data

Ratings below are for valves with standard PTFE packing. Refer to valve ratings with optional packing on Page 4.


| Valve Material                   | Stem Disc Designator                      | Temperature Range °F (°C) | Pressure Rating @ -65 to 100°F (-53 to 38°C) |
|----------------------------------|---|---------------------------|--|
| SS316<br>Alloy 400<br>Alloy C276 | Globe: Nil.<br>Regulating: -R<br>Ball: -B | -65 to 450 (-53 to 232)   | 10,000 psig (689 bar)                        |

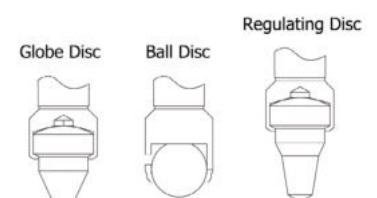

## Factory Test and Cleaning

Every valve is tested with the nitrogen gas @ 1,000 psig (68.9 bar) for leakage at the seat to a maximum allowable leak rate of 0.1 SCCM. The packing is tested for no detectable leakage. Optional hydrostatic shell test with additional cost is performed with pure water at 1.5 times the working pressure. Every valve is cleaned and packaged in accordance with DK-Lok cleaning standard DC-01.



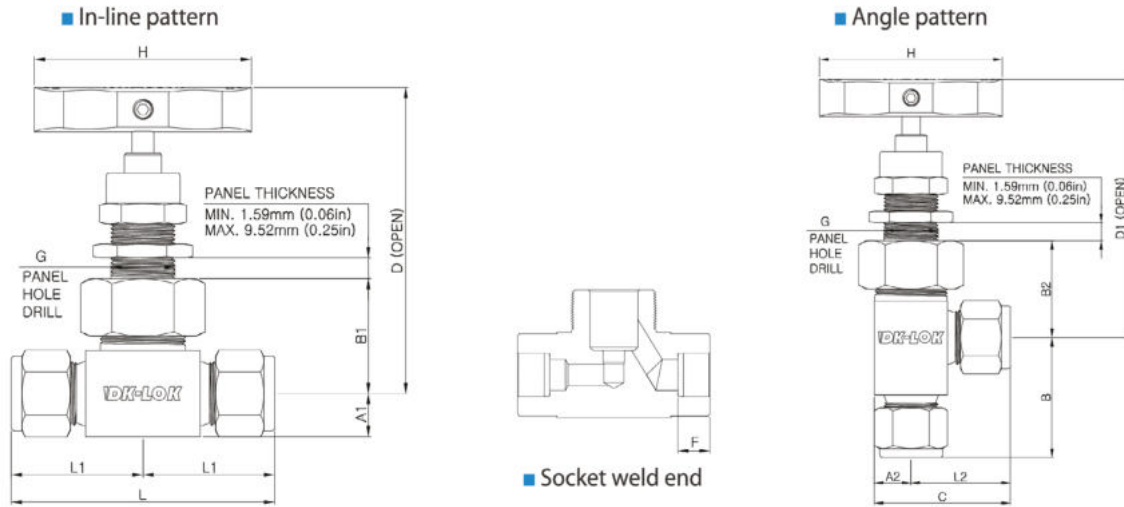

| Basic Ordering Number | End Connections |                        | Orifice mm(in.) | Cv         | Dimensions, mm(inch) |            |            |            |            |            |            |              |            |            |              |            |            |           |
|-----------------------|-----------------|------------------------|-----------------|------------|----------------------|------------|------------|------------|------------|------------|------------|--------------|------------|------------|--------------|------------|------------|-----------|
|                       | Inlet           | Outlet                 |                 |            | L                    | L1         | L2         | B          | C          | B1         | B2         | A1           | A2         | H          | G            | D          | D1         | F         |
| V16A-                 | F2N-            | 1/8 Female NPT         | 4.0<br>(0.156)  | 0.35       | 50.8(2.00)           | 25.4(1.00) | 22.6(0.89) | 25.4(1.00) | 32.3(1.27) | 27.7(1.09) | 27.7(1.09) | 9.7(0.38)    | 9.7(0.38)  | 45.0(1.77) | 15.1(19/32)  | 77.2(3.04) | 77.2(3.04) | -         |
|                       | F4N-            | 1/4 Female NPT         |                 |            | 52.3(2.06)           | 26.2(1.03) | 22.6(0.89) | 25.4(1.00) | 32.3(1.27) | 27.7(1.09) | 27.7(1.09) | 9.7(0.39)    | 9.7(0.38)  | 45.0(1.77) | 15.1(19/32)  | 77.2(3.04) | 77.2(3.04) | -         |
|                       | M4N-            | 1/4 Male NPT           |                 |            | 50.8(2.00)           | 25.4(1.00) | 25.4(1.00) | 25.4(1.00) | 35.1(1.38) | 27.7(1.09) | 27.7(1.09) | 9.7(0.38)    | 9.7(0.38)  | 45.0(1.77) | 15.1(19/32)  | 77.2(3.04) | 77.2(3.04) | -         |
|                       | MF4N-           | 1/4 Male to Female NPT |                 |            | 51.6(2.03)           | 26.2(1.03) | 22.6(0.89) | 25.4(1.00) | 32.3(1.27) | 27.7(1.09) | 27.7(1.09) | 9.7(0.39)    | 9.7(0.38)  | 45.0(1.77) | 15.1(19/32)  | 77.2(3.04) | 77.2(3.04) | -         |
|                       | D6M-            | 6mm DK-Lok             |                 |            | 61.0(2.40)           | 30.5(1.20) | 29.5(1.16) | 37.6(1.48) | 39.1(1.54) | 27.7(1.09) | 27.7(1.09) | 9.7(0.38)    | 9.7(0.38)  | 45.0(1.77) | 15.1(19/32)  | 77.2(3.04) | 77.2(3.04) | -         |
|                       | D4T-            | 1/4 DK-Lok             |                 |            | 61.0(2.40)           | 30.5(1.20) | 29.5(1.16) | 37.6(1.48) | 39.1(1.54) | 27.7(1.09) | 27.7(1.09) | 9.7(0.38)    | 9.7(0.38)  | 45.0(1.77) | 15.1(19/32)  | 77.2(3.04) | 77.2(3.04) | -         |
|                       | SW4T-           | 1/4 TSW                |                 |            | 46.2(1.82)           | 23.1(0.91) | 22.4(0.88) | 30.2(1.19) | 31.8(1.25) | 27.7(1.09) | 27.7(1.09) | 9.7(0.38)    | 9.7(0.38)  | 45.0(1.77) | 15.1(19/32)  | 77.2(3.04) | 77.2(3.04) | 7.1(0.28) |
|                       | D8M-            | 8mm DK-Lok             |                 |            | 61.0(2.40)           | 30.5(1.20) | -          | -          | -          | 27.7(1.09) | -          | 9.7(0.38)    | -          | 45.0(1.77) | 15.1(19/32)  | 77.2(3.04) | -          | -         |
| V16B-                 | F4N-            | 1/4 Female NPT         | 6.4<br>(0.25)   | 0.86       | 57.2(2.25)           | 28.4(1.12) | 25.4(1.00) | 28.4(1.12) | 38.1(1.50) | 34.0(1.34) | 37.3(1.47) | 12.7(0.50)   | 12.7(0.50) | 64.0(2.52) | 19.8(25/32)  | 92(3.62)   | 92(3.62)   | -         |
|                       | F6N-            | 3/8 Female NPT         |                 |            | 57.2(2.25)           | 28.4(1.12) | 25.4(1.00) | 28.4(1.12) | 38.1(1.50) | 34.0(1.34) | 37.3(1.47) | 12.7(0.50)   | 12.7(0.50) | 64.0(2.52) | 19.8(25/32)  | 92(3.62)   | 92(3.62)   | -         |
|                       | D10M-           | 10mm DK-Lok            |                 |            | 72.4(2.85)           | 36.1(1.42) | 33.0(1.30) | 39.4(1.55) | 45.7(1.80) | 34.0(1.34) | 34.3(1.35) | 12.7(0.50)   | 12.7(0.50) | 64.0(2.52) | 19.8(25/32)  | 92(3.62)   | 92(3.62)   | -         |
|                       | D6T-            | 3/8 DK-Lok             |                 |            | 71.9(2.83)           | 35.8(1.41) | 32.8(1.29) | 42.2(1.66) | 45.5(1.79) | 34.0(1.34) | 31.0(1.22) | 12.7(0.50)   | 12.7(0.50) | 64.0(2.52) | 19.8(25/32)  | 92(3.62)   | 92(3.62)   | -         |
|                       | D12M-           | 12mm DK-Lok            |                 |            | 77.2(3.04)           | 38.6(1.52) | 35.6(1.40) | 41.9(1.65) | 48.3(1.90) | 34.0(1.34) | 34.0(1.34) | 12.7(0.50)   | 12.7(0.50) | 64.0(2.52) | 19.8(25/32)  | 92(3.62)   | 92(3.62)   | -         |
|                       | D8T-            | 1/2 DK-Lok             |                 |            | 77.2(3.04)           | 38.6(1.52) | 35.6(1.40) | 41.9(1.65) | 48.3(1.90) | 34.0(1.34) | 34.0(1.34) | 12.7(0.50)   | 12.7(0.50) | 64.0(2.52) | 19.8(25/32)  | 92(3.62)   | 92(3.62)   | -         |
|                       | SW4P-           | 1/4 PSW                |                 |            | 57.2(2.25)           | 28.4(1.12) | 25.4(1.00) | 28.4(1.12) | 38.1(1.50) | 34.0(1.34) | 37.3(1.47) | 12.7(0.50)   | 12.7(0.50) | 64.0(2.52) | 19.8(25/32)  | 92(3.62)   | 92(3.62)   | 9.5(0.37) |
|                       | SW6T-           | 3/8 TSW                |                 |            | 57.2(2.25)           | 28.4(1.12) | 25.4(1.00) | 31.8(1.25) | 38.1(1.50) | 34.0(1.34) | 34.0(1.34) | 12.7(0.50)   | 12.7(0.50) | 64.0(2.52) | 19.8(25/32)  | 92(3.62)   | 92(3.62)   | 7.9(0.31) |
| SW8T-                 | 1/2 TSW         | 57.2(2.25)             | 28.4(1.12)      | 25.4(1.00) | 25.4(1.00)           | 38.1(1.50) | 34.0(1.34) | 35.6(1.40) | 12.7(0.50) | 12.7(0.50) | 64.0(2.52) | 19.8(25/32)  | 92(3.62)   | 92(3.62)   | 9.5(0.37)    |            |            |           |
| V16C-                 | F8N-            | 1/2 Female NPT         | 11.1<br>(0.437) | 2.20       | 79.2(3.12)           | 39.6(1.56) | 33.3(1.31) | 39.6(1.56) | 50.8(2.00) | 46.2(1.82) | 50.8(2.00) | 15.7(0.62)   | 17.5(0.69) | 90.0(3.54) | 26.2(1-1/32) | 121(4.78)  | 126(4.97)  | -         |
|                       | F12N-           | 3/4 Female NPT         |                 |            | 82.6(3.25)           | 41.1(1.62) | -          | -          | -          | 48.5(1.91) | -          | 19.8(0.78)   | -          | 90.0(3.54) | 26.2(1-1/32) | 124(4.88)  | -          | -         |
|                       | F16N-           | 1" Female NPT          |                 |            | 91.9(3.62)           | 46.0(1.81) | -          | -          | -          | 54.1(2.13) | -          | 25.4(1.00)   | -          | 90.0(3.54) | 26.2(1-1/32) | 129(5.10)  | -          | -         |
|                       | MF8N-           | 1/2 Male to Female NPT |                 |            | 79.2(3.12)           | 39.6(1.56) | 33.3(1.31) | 39.6(1.56) | 50.8(2.00) | 46.2(1.82) | 50.8(2.00) | 15.7(0.62)   | 17.5(0.69) | 90.0(3.54) | 26.2(1-1/32) | 121(4.78)  | 126(4.97)  | -         |
|                       | MF12N-          | 3/4 Male to Female NPT |                 |            | 82.6(3.25)           | 41.1(1.62) | 36.5(1.43) | 41.3(1.62) | 56.4(2.22) | 48.5(1.91) | 50.8(2.00) | 19.8(0.78)   | 19.8(0.78) | 90.0(3.54) | 26.2(1-1/32) | 124(4.88)  | 126(4.97)  | -         |
|                       | MF16N-          | 1" Male to Female NPT  |                 |            | 91.9(3.62)           | 46.0(1.81) | -          | -          | -          | 54.1(2.13) | -          | 25.4(1.00)   | -          | 90.0(3.54) | 26.2(1-1/32) | 129(5.10)  | -          | -         |
|                       | D12M-           | DK-Lok 12mm            |                 |            | 99.6(3.92)           | 49.8(1.96) | 42.7(1.68) | 52.8(2.08) | 60.2(2.37) | 46.2(1.82) | 47.3(1.88) | 15.7(0.62)   | 17.5(0.69) | 90.0(3.54) | 26.2(1-1/32) | 121(4.78)  | 123(4.85)  | -         |
|                       | D8T-            | 1/2 DK-Lok             |                 |            | 99.6(3.92)           | 49.8(1.96) | 42.7(1.68) | 52.8(2.08) | 60.2(2.37) | 46.2(1.82) | 47.3(1.88) | 15.7(0.62)   | 17.5(0.69) | 90.0(3.54) | 26.2(1-1/32) | 121(4.78)  | 123(4.85)  | -         |
|                       | D12T-           | 3/4 DK-Lok             |                 |            | 99.0(3.89)           | 49.5(1.94) | 42.7(1.68) | 52.8(2.08) | 60.2(2.37) | 46.2(1.82) | 47.3(1.88) | 15.7(0.62)   | 17.5(0.69) | 90.0(3.54) | 26.2(1-1/32) | 121(4.78)  | 123(4.85)  | -         |
|                       | D16T-           | 1 DK-Lok               |                 |            | 104(4.09)            | 51.8(2.04) | -          | -          | -          | 47.3(1.88) | -          | 17.5(0.69)   | -          | 90.0(3.54) | 26.2(1-1/32) | 123(4.85)  | -          | -         |
|                       | SW8P-           | 1/2 PSW                |                 |            | 79.2(3.12)           | 39.6(1.56) | 33.3(1.31) | 39.6(1.56) | 50.8(2.00) | 47.3(1.88) | 50.8(2.00) | 17.5(0.69)   | 17.5(0.69) | 90.0(3.54) | 26.2(1-1/32) | 123(4.85)  | 126(4.97)  | 9.5(0.37) |
|                       | SW8T-           | 1/2 TSW                |                 |            | 79.2(3.12)           | 39.6(1.56) | 33.3(1.31) | 42.9(1.69) | 50.8(2.00) | 46.2(1.82) | 47.3(1.88) | 15.7(0.62)   | 17.5(0.69) | 90.0(3.54) | 26.2(1-1/32) | 121(4.78)  | 123(4.85)  | 9.5(0.37) |
| SW12T-                | 3/4 TSW         | 79.2(3.12)             | 39.6(1.56)      | -          | -                    | -          | 46.2(1.82) | -          | 15.7(0.62) | -          | 90.0(3.54) | 26.2(1-1/32) | 121(4.78)  | -          | 11.2(0.44)   |            |            |           |

All dimensions shown are for reference only and are subject to change. Dimensions with DK-Lok nuts are in finger-tight position.

- Non-rotating globe disc providing repetitive leak tight shut-off is standard.
- To order Angle Pattern, insert -A in the basic ordering number. Refer to the ordering information on page 4.

## Ordering Information

### VH16 Series (High Pressure)



| Basic Ordering Number | End Connections |                        | Orifice mm(in.) | Cv   | Dimensions, mm(inch) |            |            |            |            |            |            |           |
|-----------------------|-----------------|------------------------|-----------------|------|----------------------|------------|------------|------------|------------|------------|------------|-----------|
|                       | Inlet           | Outlet                 |                 |      | L                    | L1         | B1         | A1         | H          | G          | D          | F         |
| VH16A-                | F2N-            | 1/8 Female NPT         | 4.0<br>(0.156)  | 0.35 | 57.2(2.25)           | 28.7(1.13) | 34.0(1.34) | 12.7(0.50) | 63.5(2.50) | 20.6(0.81) | 77.2(3.04) | -         |
|                       | F4N-            | 1/4 Female NPT         |                 |      | 57.2(2.25)           | 28.7(1.13) | 34.0(1.34) | 12.7(0.50) | 63.5(2.50) | 20.6(0.81) | 77.2(3.04) | -         |
|                       | M4N-            | 1/4 Male NPT           |                 |      | 57.2(2.25)           | 28.7(1.13) | 34.0(1.34) | 12.7(0.50) | 63.5(2.50) | 20.6(0.81) | 77.2(3.04) | -         |
|                       | MF4N-           | 1/4 Male to Female NPT |                 |      | 57.2(2.25)           | 28.7(1.13) | 34.0(1.34) | 12.7(0.50) | 63.5(2.50) | 20.6(0.81) | 77.2(3.04) | -         |
|                       | D4T-            | 1/4 DK-Lok             |                 |      | 71.6(2.82)           | 35.8(1.41) | 34.0(1.34) | 127(0.50)  | 63.5(2.50) | 20.6(0.81) | 77.2(3.04) | -         |
|                       | SW4T-           | 1/4 TSW                |                 |      | 57.2(2.25)           | 28.7(1.13) | 34.0(1.34) | 12.7(0.50) | 63.5(2.50) | 20.6(0.81) | 77.2(3.04) | 7.1(0.28) |
| VH16B-                | F4N-            | 1/4 Female NPT         | 6.4<br>(0.25)   | 0.86 | 79.5(3.13)           | 39.6(1.56) | 46.0(1.81) | 16.0(0.63) | 88.9(3.50) | 26.9(1.06) | 108(4.27)  | -         |
|                       | F8N-            | 1/2 Female NPT         |                 |      | 82.6(3.25)           | 41.4(1.63) | 48.2(1.90) | 19.8(0.78) | 88.9(3.50) | 26.9(1.06) | 111(4.36)  | -         |
|                       | M8N-            | 1/2 Male NPT           |                 |      | 79.5(3.13)           | 39.6(1.56) | 46.0(1.81) | 16.0(0.63) | 88.9(3.50) | 26.9(1.06) | 108(4.27)  | -         |
|                       | MF8N-           | 1/2 Male to Female NPT |                 |      | 82.6(3.25)           | 41.4(1.63) | 48.2(1.90) | 19.8(0.78) | 88.9(3.50) | 26.9(1.06) | 111(4.36)  | -         |

All dimensions shown are for reference only and are subject to change. Dimensions with DK-Lok nuts are in finger-tight position.

- Non-rotating globe disc providing repetitive leak tight shut-off is standard.
- To order Angle Pattern, insert -A in the basic ordering number. Refer to the ordering information on page 4.

## Pressure-Temperature Ratings

Ratings are based on valves with optional Grafoil packing.

### V16 Series

| ASME Class            | 2500                         |            | N/A         |
|-----------------------|------------------------------|------------|-------------|
|                       | Material Group               | 2.2        | 3.4         |
| Material Name         | SS316                        | Alloy 400  | Alloy C-276 |
| Temperature, °F (°C)  | Working Pressure, psig (bar) |            |             |
| -65 (-53) to 100 (38) | 6000 (413)                   | 5000 (344) | 6000 (413)  |
| 200 (93)              | 5160 (355)                   | 4400 (303) | 6000 (413)  |
| 300 (148)             | 4660 (321)                   | 4120 (283) | 6000 (413)  |
| 400 (204)             | 4280 (294)                   | 3980 (274) | 5880 (405)  |
| 500 (260)             | 3980 (274)                   | 3960 (272) | 5540 (381)  |
| 600 (315)             | 3760 (259)                   | -          | 5040 (347)  |
| 700 (371)             | 3600 (248)                   | -          | 4730 (325)  |
| 800 (426)             | 3460 (238)                   | -          | 4230 (291)  |
| 900 (482)             | 3280 (225)                   | -          | 3745 (258)  |
| 1000 (537)            | 3030 (208)                   | -          | 3030 (208)  |
| 1100 (593)            | 2685 (184)                   | -          | 2685 (184)  |
| 1200 (648)            | 1715 (118)                   | -          | 1545 (106)  |

### VH16 Series (High Pressure)

| ASME Class            | N/A                          |     |
|-----------------------|------------------------------|-----|
|                       | Material Group               | N/A |
| Material Name         | SS316                        |     |
| Temperature, °F (°C)  | Working Pressure, psig (bar) |     |
| -65 (-53) to 100 (38) | 10000(689)                   |     |
| 200 (93)              | 9290 (640)                   |     |
| 300 (148)             | 8390 (578)                   |     |
| 400 (204)             | 7705 (530)                   |     |
| 500 (260)             | 7165 (493)                   |     |
| 600 (315)             | 6770 (466)                   |     |
| 700 (371)             | 6480 (446)                   |     |
| 800 (426)             | 6230 (429)                   |     |
| 900 (482)             | 5905 (406)                   |     |
| 1000 (537)            | 5450 (375)                   |     |
| 1100 (593)            | 4835 (333)                   |     |
| 1200 (648)            | 3085 (212)                   |     |

### Grafoil packing information

Grafoil is a high temperature packing material that requires a load on the material to generate a seal. In air, Grafoil maximum temperature is 973°F (523°C), in steam, Grafoil goes up to the maximum temperature of 1,200°F (648°C). Grafoil packing is not for use with pneumatic actuating valves.

### Valve ratings with DK-Lok end connections

Valve ratings may be limited to the maximum working pressure of connective pipe and tubing. For valve rating with DK-Lok tube fitting end connections, refer to DK-Lok catalog providing suggested working pressures in various tubing OD, wall thicknesses, and materials.


### Packing adjustment and actuation torque

Extreme temperature fluctuations while valve in service may require packing adjustment. Valves that have not been actuated for a period of time may have a higher initial actuation torque.

### Valve ratings with optional PEEK packing

SS316 and C276 valve with PEEK packing is limited to maximum 600 °F (315 °C) rating; Alloy 400 valve with PEEK packing is limited to maximum 500 °F (260 °C) rating.

## Flow Data @ 100°F (38°C) for valves with regulating disc

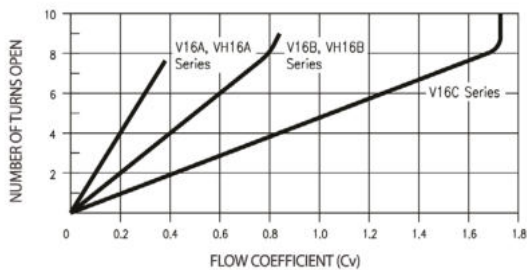

### Globe and Ball Disc

Valve with standard globe and ball disc is designed for use in a fully open or fully closed position.

Refer to Cv in the ordering information and dimensions table on Page 2.

### Cv reduction

Valve flow may be reduced by the restriction of pipe and tubing connected.



## Sour Gas Valves

Valves for use in sour gas are available. Valve wetted components are selected to the requirements of NACE MR0175 for sulfide stress cracking resistant materials. To order, insert -SG in the basic ordering number.

## Optional Handles

SS316 bar handle is standard. Optional anodized black aluminum bar handle is available. To order valve with factory-assembled optional aluminum handle, insert designator -AH in the ordering number. To order handle for field assembly, select desired handle ordering number from the table.

| Valve Series | Field Assembly Bar Handle |          |
|--------------|---------------------------|----------|
|              | SS316                     | Aluminum |
| V16A         | V16A-BH                   | V16A-AH  |
| V16B         | V16B-BH                   | V16B-AH  |
| V16C         | V16C-BH                   | V16C-AH  |

## Ordering Information

Select the desired valve basic ordering number, options and body material.

Regulating stem disc is standard for VH16 series.

Optional ball stem disc stem is available.

To order, insert designator -R or -B in the ordering number.

| V16B-D-6T-   | A                          | -PK                                      | -B  |  | -BD                                |  |   |
|--------------|----------------------------|--|---|--|------------------------------------|--|---|
| V16C-MF-12N- |                            | GF                                       |   | -AH  | -SG                                | -S   |   |
| VH16B-F-8N-  | Valve Pattern Designator   | Packing Material Designator              | Stem Disc Designator                      | Handle Designator  | Sour Gas Designator                | Pneumatic Actuator Designator                        | Valve Material Designator                     |
|              | Nil : In-line<br>A : Angle | Nil : PTFE<br>PK : PEEK<br>GF : Grafoil* | Nil : Globe<br>R : Regulating<br>B : Ball | Nil : Stainless Steel Formed handle for V16, SS316 bar handle for VH16<br>AH : Aluminum bar handle for V16 | Nil : no Sour Gas<br>SG : Sour Gas | Refer to the actuator ordering information on page 6 | S : SS316<br>M : Alloy 400<br>HC : Alloy C276 |

\*Grafoil TM UCAR

We reserve the right to change the specifications stated in this catalog for our continuing program of valve improvement.


## Pneumatic Actuators

V16 series Pneumatic actuators are designed to actuate valves remotely.

V16A and V16B series are available to be equipped with pneumatic actuators in normally closed, normally open, and double-acting models.



### Dimensions

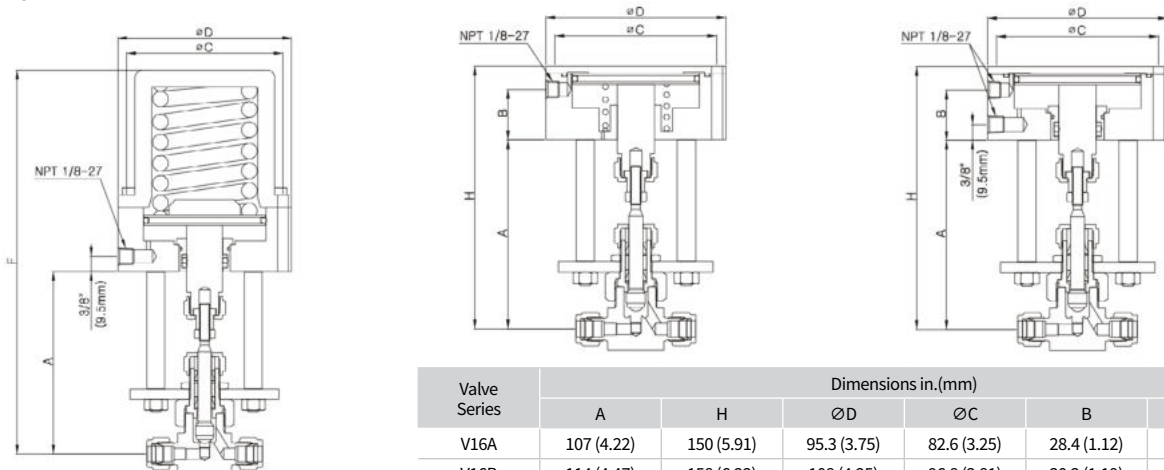

All dimensions are reference only and subject to change.

### Actuator Technical Data Pressure-Temperature Ratings

| Normally closed                                    | Normally open and double acting                    |
|--|--|
| 150 psig (10.3 bar)<br>-20 to 300°F (-28 to 148°C) | 150 psig (10.3 bar)<br>-20 to 400°F (-28 to 204°C) |

### Pneumatic Actuator Applicability

V16A and V16B series valves with PTFE or PEEK packing are applicable to pneumatic actuator. Those valves with Grafoil packing are not applicable to pneumatic actuator.

### Operation Information

Curve 1 - 6 indicate the minimum actuator pressure to open or close pneumatic actuators against system pressure.  
To prolong valve life, actuators should be operated at minimum air actuator pressures.  
Curves shown are based on packing bolt factory adjustment.  
Packing bolt adjustment may be required to maintain the valve leak-tight.  
If the packing bolt is over-tightened, the actuating pressure can not overcome the friction force between the over-tightened packing and the stem  
If the packing bolt is under-tightened for low system pressures, it may leak at high system pressures.  
However, packing bolt torque must be sufficiently maintained to prevent packing from leakage.




### Normally Closed Actuators

Adjusting the actuator stem drive nut affects the actuator inside the spring force.  
This will also have implications for other actuator components sequentially.




**Normally Open Actuators**

The stem orifice opens beyond the first open position depends on system pressure, flow characteristics of the fluid and valve packing nut adjustment.

**V16A Series**

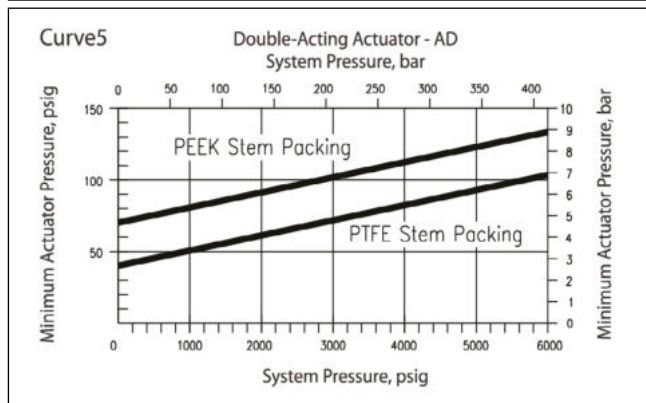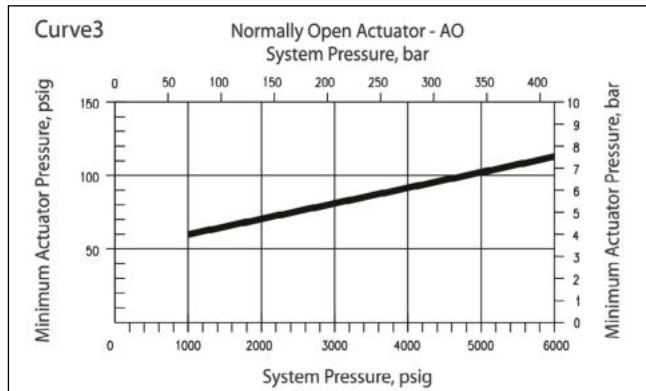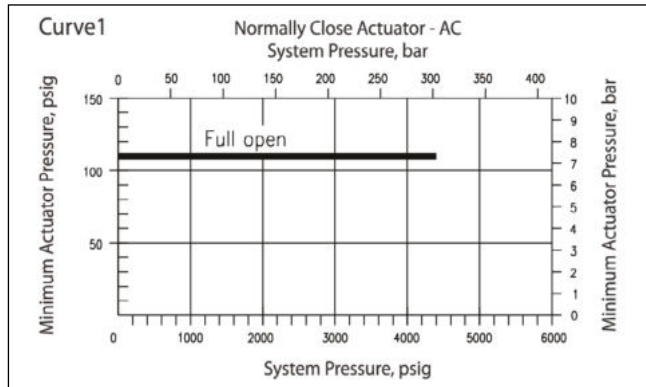

**V16B Series**

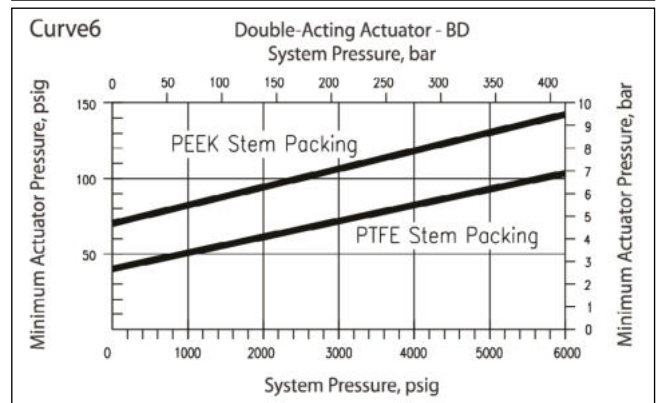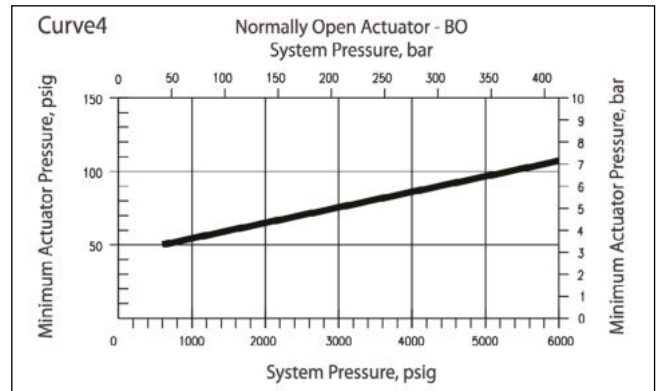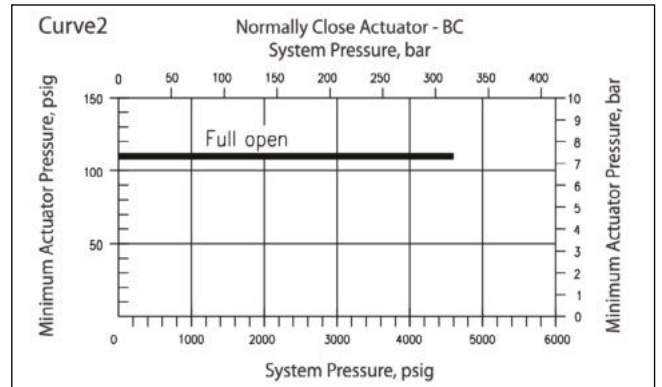

**Actuator Ordering Information**

To order valves with a pneumatic double acting actuator, insert the desired actuator designator from the chart in the valve ordering number.  
Example: V16B-D6T-PK-B-**BD**-S

| Valve Series | Pneumatic Actuator Designator |               |               |
|--------------|-------------------------------|---------------|---------------|
|              | Normally Closed               | Normally Open | Double Acting |
| V16A         | AC                            | AO            | AD            |
| V16B         | BC                            | BO            | BD            |

**Safe Valve Selection**

The selection of a valve for any application or system design must be considered to ensure safe performance. Valve function, valve rating, material compatibility, proper installation, operation and maintenance remain the sole responsibility of the system designer and the user. DK-Lok accepts no liability for any improper selection, installation, operation or maintenance.



경상남도 김해시 주촌면 골든루트로 129번길 7 50969

7, Golden root-ro 129beon-gil, Juchon-myeon, Gimhae-si, Gyeongsangnam-do, South Korea. 50969

Tel. +82-55-338-0114 Fax. +82-55-901-0141 [www.dklok.com](http://www.dklok.com)

---

**VDK-LOK**

# **VB16-V46A Needle Valves**

Rev. 01-01  
Aug. 2023



Pressure Rating up to 6,000 psig




## Features

- Two-piece chevron PFA stem packing design with compensating spring packing.
- improves sealing integrity.
  - high pressure valve but with compact design.

## Flow Data

Cv are measured at the valve. Therefore restrictions at end connections may reduce flow.

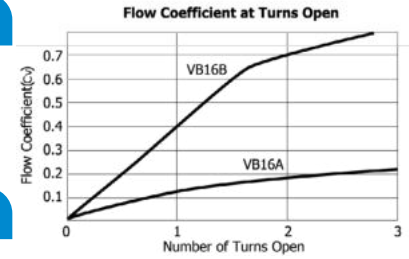

## Materials of Construction


| Components                | Material Grade          |
|---------------------------|-------------------------|
| 1 Bar Handle              | SS316/ASTM A276         |
| 2 Position Pin            |                         |
| 3 Set Screw               | Grade B8 TYPE 304/A193  |
| 4 Optional Round Handle   | Nylon with brass insert |
| 5 Cap Nut                 | SS316/ASTM A276         |
| 6 Gland                   |                         |
| 7 Spring Packing (2)      | S17700/A693             |
| 8 Upper / Lower Gland (2) | SS316/ASTM A276         |
| 9 Chevron Packing (2)     | PFA/D3307               |
| 10 Standard Vee Stem      | SS316/ASTM A276         |
| 10.1 Optional Soft Stem   | Kel-F (PCTFE)           |
| 11 Body                   | SS316/ASTM A276         |

## Pressure-Temperature Ratings

Temperature rating of VB16A & B series with nonrotating Kel-F soft seat -65 to 200 °F (-53 to 93 °C), Vee stem metal seat -65 to 450 °F (-53 to 232 °C).

Non-rotating soft seal for repetitive shut-off on gas

|                        |                              |
|------------------------|------------------------------|
| ASME Class             | 2500                         |
| Material Group         | 2.2                          |
| Material               | SS316                        |
| Temperature °F (°C)    | Working Pressure, psig (bar) |
| -65 to 100 (-53 to 37) | 6000 (413)                   |
| 200 (93)               | 5160 (355)                   |
| 250 (121)              | 4910 (338)                   |
| 300 (148)              | 4660 (321)                   |

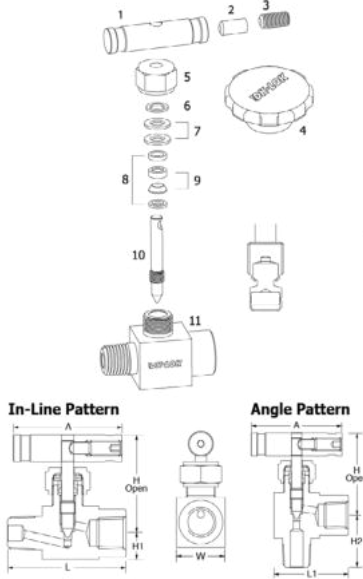

## Ordering Information and Dimensions

| Ordering Number | End Connection |                                       | Dimensions, mm(in.)       |                |             |             |             | A               | W              |                |
|-----------------|----------------|---------------------------------------|---------------------------|----------------|-------------|-------------|-------------|-----------------|----------------|----------------|
|                 |                |                                       | Orifice/Cv                | H              | H1          | H2          | L           |                 |                | L1             |
| VB16A-          | D4T-S          | 1/4 in. DK-Lok                        | 3.2<br>(0.125)<br>Cv 0.21 | 43.1<br>(1.69) | 10.7 (0.42) | 29.5 (1.16) | 62.5 (2.46) | 39.9 (1.57)     | 44.5<br>(1.75) | 21.6<br>(0.85) |
|                 | F4N-S          | 1/4 in. Female NPT                    |                           |                | 25.4 (1.00) | 47.8 (1.88) | 36.6 (1.44) |                 |                |                |
|                 | M4N-S          | 1/4 in. Male NPT                      |                           |                | 49.3 (1.94) | -           | -           |                 |                |                |
|                 | MF4N-S         | 1/4 in. Male   1/4 in. Female         |                           |                | 26.2 (1.03) | 48.5 (1.91) | 36.6 (1.44) |                 |                |                |
| VB16B-          | D6T-S          | 3/8 in. DK-Lok                        | 6.4<br>(0.25)<br>Cv 0.73  | 58.0<br>(2.28) | 16.8 (0.66) | -           | 78.2 (3.08) | -               | 64.0<br>(2.52) | 32.0<br>(1.26) |
|                 | D8T-S          | 1/2 in. DK-Lok                        |                           |                | -           | 83.8 (3.30) | -           |                 |                |                |
|                 | F6N-S          | 3/8 in. Female NPT                    |                           |                | -           | -           | -           |                 |                |                |
|                 | F8N-S          | 1/2 in. Female NPT                    |                           |                | 35.8 (1.41) | 63.5 (2.50) | 52.3 (2.06) | *50.0<br>(1.97) |                |                |
|                 | MF6N-S         | 3/8 in. Male NPT   3/8 in. Female NPT |                           |                | 31.0 (1.22) |             |             |                 |                |                |
|                 | MF8N-S         | 1/2 in. Male NPT   1/2 in. Female NPT |                           |                | 35.8 (1.41) |             |             |                 |                |                |
|                 | MF12N8N-S      | 3/4 in. Male NPT   1/2 in. Female NPT |                           |                | -           | -           | -           |                 |                |                |

**Angle Pattern:** Valves with L1 dimension available for Angle Pattern. \* Round handle diameter. To order a valve with soft stem, insert -K in the ordering number. i.e., VB16A-D4T-K-S

## Factory Test

Every valve is tested with the nitrogen @ 68 bar (1,000 psig) for leakage at the seat to a maximum allowance leak rate of 0.1 scc /min. The stem packing is tested for no detectable leakage.

## Safe Valve Selection

The selection of a valve for any application or system design must be considered to ensure safe performance. Valve function, valve rating, material compatibility, proper installation, operation and maintenance remain the sole responsibility of the system designer and the user. DK-Lok accepts no liability for any improper selection, installation, operation or maintenance.



### Features

- **Packing bolt** permits packing adjustment externally.
- **Chevron PTFE packing** design provides far improved sealing integrity.
- **Packing** below stem threads is to isolate **threads** from system fluid and lubricant washout.
- **Non-rotating** stem tip at closure for long-life and leak-tight shutoff.
- **Lock plate** ensures the valve fastened to the body.
- **NACE MR0175/ISO 15156-3** applicable

### Pressure-Temperature Ratings


| Body Material   | Packing material | Temperature Rating              | Pressure Rating @ 38 °C (100 °F) | Pressure Rating @ Max. Temp.              |
|-----------------|------------------|---------------------------------|----------------------------------|---|
| Stainless steel | PTFE             | -54 to 232 °C (-65 to 450 °F)   | 689 bar (10,000 psig)            | 285 bar @ 232 °C<br>4,130 psig @ 450 °F   |
|                 | Grafoil          | -54 to 648 °C (-65 to 1,200 °F) |                                  | 118 bar @ 648 °C<br>1,715 psig @ 1,200 °F |
| Carbon steel    | PTFE             | -29 to 176 °C (-20 to 350 °F)   | 689 bar (10,000 psig)            | 360 bar @ 176 °C<br>(5,230 psig @ 350 °F) |
|                 | Grafoil          | -29 to 176 °C (-20 to 350 °F)   |                                  |   |

### Materials of Construction

| Component           | Valve Body Materials                             |   |
|---------------------|--|---|
|                     | Stainless steel                                  | Carbon steel                                  |
| 1. Handle           | Stainless steel                                  | Carbon steel                                  |
| 2. Set screw        |  | Carbon steel                                  |
| 3. Cap nut          |  | Carbon steel                                  |
| 4. Packing bolt     | SS316/A276 or A479                               | C.Steel/JIS G4051                             |
| 5. Gland            |  | SS316/A276 or A479                            |
| 6. Packing supports | Standard chevron PTFE packing. Optional Grafoil. |   |
| 7. Packing          |  | SS316/A276 or A479                            |
| 8. Bonnet           | SS316/A276 or A479                               | C.Steel/JIS G4051                             |
| 9. Stem             |  | SS316/A276 or A479                            |
| 10. stem disc       | SS630/A564                                       |   |
| 11. Lock bolt       | Stainless steel                                  |   |
| 12. Lock plate      | Stainless steel                                  |   |
| 13. Body            | SS316/A276 or A479                               | C.Steel/ JIS G4051,<br>White zinc galvanized. |

Wetted components listed in blue.

Grafoil : TM UCAR

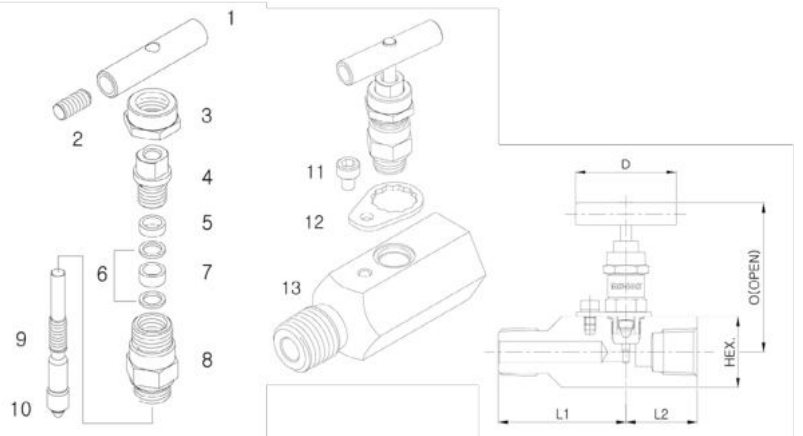

### Ordering Information and Dimensions

| Basic Ordering No. | End Connection |                | Orifice in. (mm) | Cv         | Dimensions, in. (mm) |             |             |              |           |             |
|--------------------|----------------|----------------|------------------|------------|----------------------|-------------|-------------|--------------|-----------|-------------|
|                    | Inlet          | Outlet         |                  |            | L                    | L1          | L2          | Hex          | D         | O           |
| V46A-              | D-4T-          | 1/4 DK-Lok     | 0.126 (3.2)      | 0.37       | 3.21 (81.5)          | 1.59 (40.4) | 1.62 (41.1) | 1.25 (31.75) | 1.77 (45) | 2.64 (67.2) |
|                    | D-6T-          | 3/8 DK-Lok     |                  | 0.64       | 3.33 (84.5)          | 1.65 (41.9) | 1.68 (42.6) |              |           |             |
|                    | D-8T-          | 1/2 DK-Lok     |                  | 0.83       | 3.54 (90.0)          | 1.76 (44.7) | 1.78 (45.3) |              |           |             |
|                    | F-4N-          | 1/4 Female NPT |                  | 0.83       | 3.0 (76.2)           | 1.75 (44.4) | 1.25 (31.8) |              |           |             |
|                    | F-6N-          | 3/8 Female NPT |                  |            |                      |             |             |              |           |             |
|                    | F-8N-          | 1/2 Female NPT |                  |            |                      |             |             |              |           |             |
|                    | MF-8N-         | 1/2 Male NPT   | 1/2 Female NPT   | 3.5 (88.9) | 2.25 (57.1)          |             |             |              |           |             |
|                    | MF-12N8N-      | 1/2 Male NPT   | 1/2 Female NPT   |            |                      | 2.25 (57.1) |             |              |           |             |

Dimensions shown are for reference only and subject to change.

### How to order

- To complete ordering number, add material designator **S** for stainless steel or **C** for carbon steel. Example V46A-F8N-**S**
- To order optional Grafoil packing, insert **GF** to the ordering number. Example V46A-F8N-**GF-S**
- To order NACE applicable valve, insert **SG** to the ordering number. Example V46A-F8N-**GF-SG-S**



### Factory test, cleaning and packaging

- Every valve is factory tested with nitrogen @ 69 bar (1,000 psig) for leakage at the seat to a maximum allowable leak rate of 0.1 SCCM.
- Stem packing is tested for no detectable leakage.
- Every valve is cleaned and packaged in accordance with DK-Lok Corporation cleaning standard DC-01. Optional DC-11 cleaning for oxygen application is available on request.

### Packing adjustment and Actuation Torque

- Extreme or rapid temperature cycle while valve in service may require packing adjustment.
- Valves that have not been actuated for a period of time may have a higher initial actuation torque.

### Safe Valve Selection

The selection of a valve for any application or system design must be considered to ensure safe performance. Valve function, valve rating, material compatibility, proper installation, operation and maintenance remain the sole responsibility of the system designer and the user. DK-Lok accepts no liability for any improper selection, installation, operation or maintenance.



경상남도 김해시 주촌면 골든루트로 129번길 7 50969

7, Golden root-ro 129beon-gil, Juchon-myeon, Gimhae-si, Gyeongsangnam-do, South Korea. 50969

Tel. +82-55-338-0114 Fax. +82-55-901-0141 [www.dklok.com](http://www.dklok.com)

---

**VDK-LOK**

# **VEX110 Needle Valves**

Rev. 01-01  
Aug. 2023

## Bar Stock Union Bonnet High Pressure Needle Valve Maximum Working Pressure 10,000 psig (689 bar)

### Features

- Premium multiple four (4) sealing mechanism.
- Unique pressure reacting sealing system eliminates the need of packing adjustment.
- Sealing cup swells up in system pressure for leak-tight operation.
- Backseat stem design prevents stem blowout.
- High precision machining provides low valve operating torque.
- Stem packing below the threads prevents thread lubricant washout and media contamination.

### Temperature and Pressure Ratings

| Valve Material | Optional Valve O-ring Designator | Standard Sealing Cup Material | Temp. Rating °C (°F)  | Pressure Rating @ 38°C (100°F) |
|----------------|----------------------------------|-------------------------------|-----------------------|--------------------------------|
| SS316          | KZ*                              | PEEK                          | -30 ~ 250 (-22 ~ 482) | 689 bar (10,000 psi)           |
|                | VT*                              |                               | -30 ~ 204 (-22 ~ 399) |                                |

\*KZ: Kalrez ( Perfluoroelastomer ), TM Dupont

\*VT: Viton ( Vinylidene fluoride-based fluoroelastomer ), TM Dupont


### Material of Construction

| #  | Component                 | Material / ASTM                     |
|----|---------------------------|-------------------------------------|
| 1  | Body                      | S316/A479, A276                     |
| 2  | Bonnet                    | S316/A479, A276                     |
| 3  | Stem                      | S316/A479, A276                     |
| 4  | Sealing Cup               | Standard Polyetheretherketon-PEEK   |
| 5  | Packing                   |                                     |
| 6  | Upper & Lower O-ring seal | Kalrez or Viton                     |
| 7  | Handle guide              | Poly Oxy Methylene-Copolymer- POM C |
| 8  | Handle pin                | S316/A479, A276                     |
| 9  | Set screw                 |                                     |
| 10 | Bar Handle                |                                     |
| 11 | Bonnet Locking Pin        |                                     |


**Lubrication :** Molybdenum disulfide lubricant

**Note:** 1. Wetted components are marked in **blue**.  
 2. Sealing system is marked in **Red**.

### In-line pattern

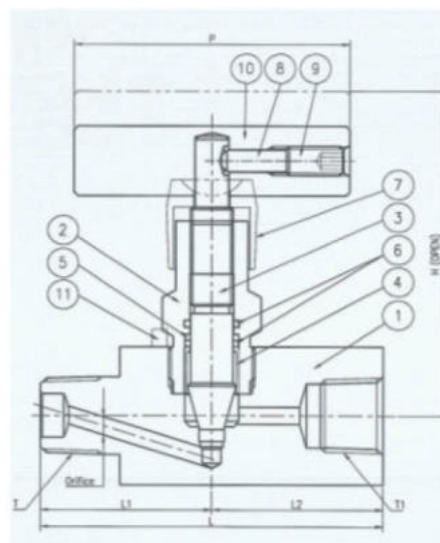

### Angle pattern

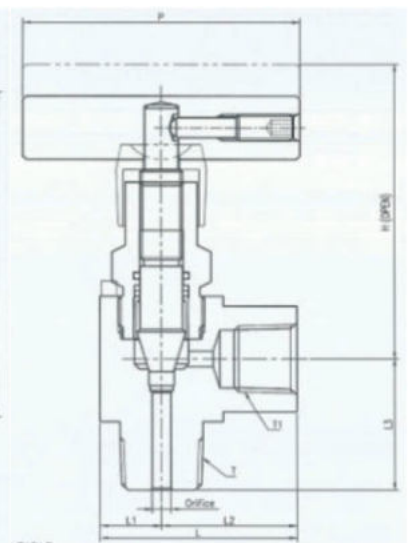

### Ordering Information and Table of Dimensions


| Basic Ordering Number    | End Connections |               | Orifice mm (in.) | Cv          | Dimensions, mm (inch) |            |              |              |             |             |             |
|--------------------------|-----------------|---------------|------------------|-------------|-----------------------|------------|--------------|--------------|-------------|-------------|-------------|
|                          | Inlet           | Outlet        |                  |             | L                     | L1         | L2           | L3           | H           | P           |             |
| In-line pattern VEX110B- | MF-4N-*S        | 1/4" Male NPT | 1/4" Female NPT  | 4.76 (0.19) | 0.75                  | 88.9 (3.5) | 44.45 (1.75) | 44.45 (1.75) | -           | 90.0 (3.54) | 71.5 (2.81) |
|                          | MF-6N-*S        | 3/8" Male NPT | 3/8" Female NPT  |             |                       | -          | 90.0 (3.54)  | 71.5 (2.81)  |             |             |             |
|                          | MF-8N-*S        | 1/2" Male NPT | 1/2" Female NPT  |             |                       | -          | 90.0 (3.54)  | 71.5 (2.81)  |             |             |             |
| Angle pattern VEX110B-   | MF-4N-A-*S      | 1/4" Male NPT | 1/4" Female NPT  |             |                       | 50.8 (2.0) | 15.87 (0.62) | 34.93 (1.38) | 36.6 (1.44) | 90.0 (3.54) | 71.5 (2.81) |
|                          | MF-6N-A-*S      | 3/8" Male NPT | 3/8" Female NPT  |             |                       |            |              |              |             |             |             |
|                          | MF-8N-A-*S      | 1/2" Male NPT | 1/2" Female NPT  |             |                       |            |              |              |             |             |             |

#### \*Ordering information

To order valve with Viton o-ring, insert the designator "VT" to the valve ordering number.  
 To order valve with Kalrez o-ring, insert the designator "KZ" to the valve ordering number.

Example: VEX110B-MF-4N-VT-S.  
 Example: VEX110B-MF-8N-A-KZ-S.

### Flow Coefficient at Turns Open

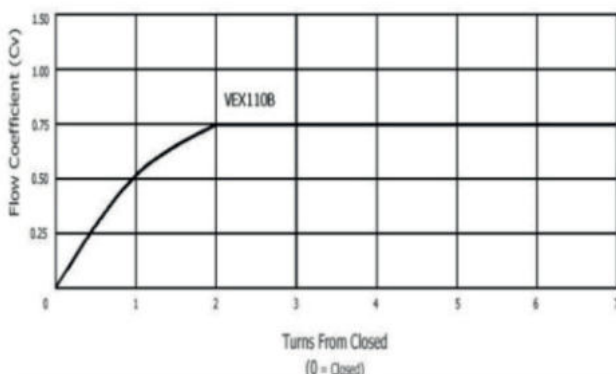

### Flow Data

Cv is measured at the valve.  
 Restrictions in end connections may reduce the flow.

### Factory Test

Every valve is tested with the nitrogen @ 68 bar (1,000 psig) at the seat to a maximum allowable leak rate of 0.1 scc/min. The packing is tested for no detectable leakage.



Model Shown: Angle Pattern VEX110B-MF-8N-A-VT-S



경상남도 김해시 주촌면 골든루트로 129번길 7 50969

7, Golden root-ro 129beon-gil, Juchon-myeon, Gimhae-si, Gyeongsangnam-do, South Korea. 50969

Tel. +82-55-338-0114 Fax. +82-55-901-0141 [www.dklok.com](http://www.dklok.com)

---

**VDK-LOK**


**VG16 Series**

Rev. 01-01  
Aug. 2023

## Features




- Compact and sturdy design.
- Sintered molded handle for the user of the handle operational convenience.
- Stainless steel spring pin in order to prevent the loosening of bonnet.
- The fluid is not in contact with the threaded stem.
- VG16 series Isolates and vents the system media in instrument air, nitrogen header, lube oil, and general utility service applications in the oil and gas, chemical, petrochemical, and other general industrial markets.

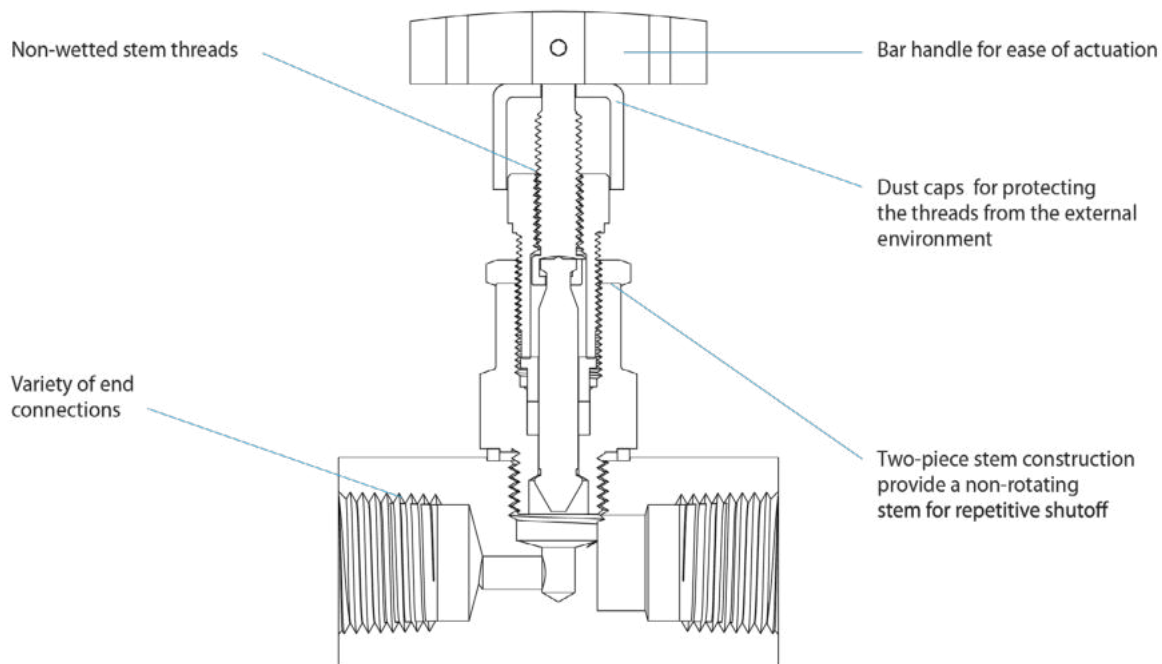

## Design

- Straight and angle patterns.
- Standard PTFE packing, and optional Graphite packing for higher temperature service.
- Broad choices of end connections include reliable NPT & ISO Male & Female pipe threads.

## Material of Construction

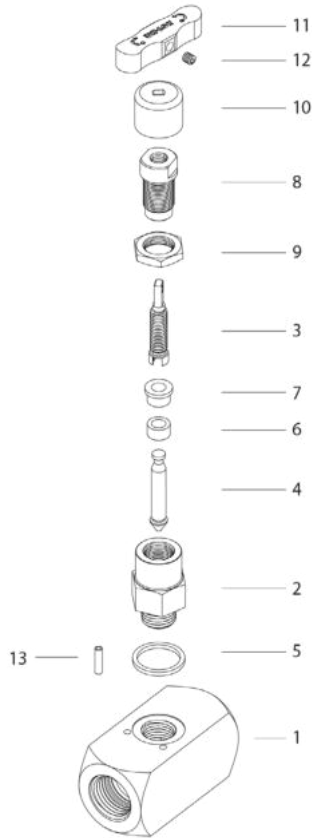

| Component           | Valve Body Materials                 |                                    |
|---------------------|--------------------------------------|------------------------------------|
|                     | Stainless Steel                      | Carbon Steel                       |
|                     | Material Grade/ASTM Specification    |                                    |
| 1. Body             | SS316 / A276                         | Zinc plated carbon steel/AISI 1018 |
| 2. Bonnet           | SS316 / A276                         |                                    |
| 3. Stem             | SS316 / A276                         |                                    |
| 4. Stem disc        | S17400 SS / A564 Condition H1150D    |                                    |
| 5. Bonnet seal ring | SS316 / A276                         |                                    |
| 6. Packing          | Carbon/glass-filled PTFE or graphite |                                    |
| 7. Gland            | SS316 / A276                         |                                    |
| 8. Packing Bolt     | SS316 / A276                         |                                    |
| 9. Lock nut         | Stainless steel                      |                                    |
| 10. Cap             | Stainless steel                      |                                    |
| 11. Handle          | Stainless steel                      |                                    |
| 12. Set screw       | Stainless steel                      |                                    |
| 13. Spring pin      | Stainless steel                      |                                    |



\* Wetted parts are listed in blue.

## Pressure-Temperature Ratings

| Temperature, °F(°C)  | Packing Material            |            |
|----------------------|-----------------------------|------------|
|                      | PTFE                        | Graphite   |
|                      | Working Pressure, psig(bar) |            |
| -20 (-28) to 0 (-17) | -                           | 6000 (413) |
| 0 (-17) to 100 (37)  | 6000 (413)                  | 6000 (413) |
| 200 (93)             | 5160 (355)                  | 5160 (355) |
| 300 (148)            | 4680 (322)                  | 4680 (322) |
| 400 (204)            | 4260 (293)                  | 4260 (293) |
| 450 (232)            | 4110 (283)                  | 4110 (283) |
| 500 (260)            | -                           | 3960 (272) |
| 600 (315)            | -                           | 3780 (260) |
| 650 (343)            | -                           | 3660 (252) |





**Ordering Information and Table of Dimensions**

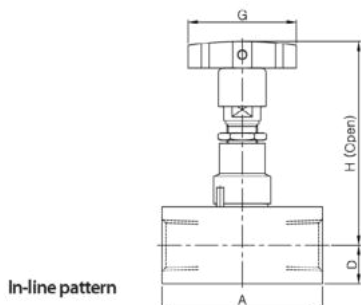

| Valve Basic Ordering Number | End Connections       |                       | Orifice mm(in.) | Cv              | DIMENSION, mm(in.) |                 |            |            |            |            |   |   |
|-----------------------------|-----------------------|-----------------------|-----------------|-----------------|--------------------|-----------------|------------|------------|------------|------------|---|---|
|                             | Inlet                 | Outlet                |                 |                 | G                  | D               | H          | A          | E          | B          | C |   |
| VG16A                       | F-4N                  | 1/4" Female NPT       | 5.0(0.20)       | 0.45            | 45(1.77)           | 12.7(0.50)      | 81.2(3.20) | 54.1(2.13) | -          | -          | - |   |
|                             | F-4N-A                |                       |                 | -               |                    | 21.6(0.85)      |            | 38.1(1.50) | 25.4(1.00) |            |   |   |
|                             | F-6N                  | 3/8" Female NPT       |                 | 0.45            |                    | 12.7(0.50)      | 57.2(2.25) | -          | -          | -          |   |   |
|                             | F-6N-A                |                       |                 | -               |                    | 27.9(1.10)      | 44.5(1.75) | 31.8(1.25) |            |            |   |   |
|                             | F-8N                  | 1/2" Female NPT       |                 | 0.45            |                    | 16.0(0.63)      | 84.6(3.33) | 66.8(2.63) | -          | -          | - |   |
|                             | F-8N-A                |                       |                 | -               |                    | 31.2(1.23)      | 51.0(2.00) | 33.3(1.31) |            |            |   |   |
|                             | MF-4N                 |                       |                 | 1/4" Male NPT   |                    | 1/4" Female NPT | 0.55       | -          | -          | -          | - |   |
|                             | MF-6N                 | 3/8" Male NPT         |                 | 3/8" Female NPT |                    | 0.45            | 12.7(0.50) | 81.2(3.20) | 60.5(2.38) | -          | - | - |
|                             | MF-8N                 | 1/2" Male NPT         |                 | 1/2" Female NPT |                    | 0.45            | 16.0(0.63) | 84.6(3.33) | 70.0(2.76) | -          | - | - |
|                             | SW-4P                 | 1/4" Pipe Socket weld |                 | 0.45            |                    | 12.7(0.50)      | 81.2(3.20) | 57.2(2.25) | -          | -          | - |   |
|                             | SW-6P                 | 3/8" Pipe Socket weld |                 | 0.45            |                    | 16.0(0.63)      | 84.6(3.33) | 63.5(2.50) | -          | -          | - |   |
|                             | SW-8P                 | 1/2" Pipe Socket weld |                 | 0.45            |                    | 19.1(0.75)      | 87.6(3.45) | 63.5(2.50) | -          | -          | - |   |
|                             | SW-4T                 | 1/4" Tube Socket weld |                 | 0.45            |                    | 12.7(0.50)      | 81.2(3.20) | 50.8(2.00) | -          | -          | - |   |
|                             | SW-6T                 | 3/8" Tube Socket weld |                 | 0.45            |                    | 12.7(0.50)      | 81.2(3.20) | 57.2(2.25) | -          | -          | - |   |
|                             | SW-8T                 | 1/2" Tube Socket weld |                 | 0.45            |                    | 12.7(0.50)      | 81.2(3.20) | 60.5(2.38) | -          | -          | - |   |
|                             | SW-6M                 | 6mm Tube Socket weld  |                 | 0.45            |                    | 12.7(0.50)      | 81.2(3.20) | 51.0(2.00) | -          | -          | - |   |
|                             | SW-8M                 | 8mm Tube Socket weld  |                 | 0.45            |                    | 12.7(0.50)      | 81.2(3.20) | 57.2(2.25) | -          | -          | - |   |
|                             | SW-10M                | 10mm Tube Socket weld |                 | 0.45            |                    | 12.7(0.50)      | 81.2(3.20) | 57.2(2.25) | -          | -          | - |   |
| SW-12M                      | 12mm Tube Socket weld |                       | 0.45            | 12.7(0.50)      | 81.2(3.20)         | 57.2(2.25)      | -          | -          | -          |            |   |   |
| VG16B                       | F-8N                  | 1/2" Female NPT       | 8.0(0.31)       | 1.20            | 64(2.52)           | 16.0(0.63)      | 98.3(3.87) | 70.0(2.76) | -          | -          | - |   |
|                             | F-8N-A                | 1/2" Female NPT       |                 | 1.60            |                    | -               |            | 31.2(1.23) | 51.0(2.00) | 35.1(1.38) |   |   |
|                             | F-12N                 | 3/4" Female NPT       |                 | 1.20            |                    | 19.1(0.75)      | 101(3.98)  | 76.2(3.00) | -          | -          | - |   |
|                             | F-12N-A               | 3/4" Female NPT       |                 | 1.60            |                    | -               | -          | 40.6(1.60) | 63.5(2.50) | 38.1(1.50) |   |   |
|                             | F-16N                 | 1" Female NPT         |                 | 1.20            |                    | 25.4(1.00)      | 108(4.25)  | 88.9(3.50) | -          | -          | - |   |
|                             | F-16N-A               | 1" Female NPT         |                 | 1.60            |                    | -               | -          | 40.6(1.60) | 70.0(2.76) | 44.5(1.75) |   |   |
|                             | MF-8N                 | 1/2" Male NPT         |                 | 1/2" Female NPT |                    | 1.20            | 16.0(0.63) | 98.3(3.87) | 76.2(3.00) | -          | - | - |
|                             | MF-12N                | 3/4" Male NPT         |                 | 3/4" Female NPT |                    | 1.20            | 19.1(0.75) | 101(3.98)  | 79.6(3.13) | -          | - | - |
|                             | MF-16N                | 1" Male NPT           |                 | 1" Female NPT   |                    | 1.20            | 25.4(1.00) | 108(4.25)  | 88.9(3.50) | -          | - | - |
|                             | SW-8P                 | 1/2" Pipe Socket weld |                 | 1.20            |                    | 19.1(0.75)      | 101(3.98)  | 66.8(2.63) | -          | -          | - |   |
|                             | SW-12P                | 3/4" Pipe Socket weld |                 | 1.20            |                    | 22.4(0.88)      | 105(4.13)  | 82.6(3.25) | -          | -          | - |   |
|                             | SW-16P                | 1" Pipe Socket weld   |                 | 1.20            |                    | 25.4(1.00)      | 108(4.25)  | 88.9(3.50) | -          | -          | - |   |
|                             | SW-8T                 | 1/2" Tube Socket weld |                 | 1.20            |                    | 16.0(0.63)      | 98.3(3.87) | 66.8(2.63) | -          | -          | - |   |
|                             | SW-12T                | 3/4" Tube Socket weld |                 | 1.20            |                    | 19.1(0.75)      | 101(3.98)  | 66.8(2.63) | -          | -          | - |   |
|                             | SW-16T                | 1" Tube Socket weld   |                 | 1.20            |                    | 19.1(0.75)      | 101(3.98)  | 66.8(2.63) | -          | -          | - |   |
|                             | SW-12M                | 12mm Tube Socket weld |                 | 1.20            |                    | 16.0(0.63)      | 98.3(3.87) | 66.8(2.63) | -          | -          | - |   |
|                             | SW-14M                | 14mm Tube Socket weld |                 | 1.20            |                    | 16.0(0.63)      | 98.3(3.87) | 66.8(2.63) | -          | -          | - |   |
|                             | SW-16M                | 16mm Tube Socket weld |                 | 1.20            |                    | 16.0(0.63)      | 98.3(3.87) | 66.8(2.63) | -          | -          | - |   |
| VG16C                       | F-12N                 | 3/4" Female NPT       | 11.0(0.43)      | 2.25            | 64(2.52)           | 22.4(0.88)      | 133(5.24)  | 82.6(3.25) | -          | -          | - |   |
|                             | F-16N                 | 1" Female NPT         |                 |                 |                    | 25.4(1.00)      |            | 136(5.35)  | 102(4.02)  | -          | - | - |
|                             | MF-12N                | 3/4" Male NPT         |                 |                 |                    | 3/4" Female NPT | 22.4(0.88) | 133(5.24)  | 88.9(3.50) | -          | - | - |
|                             | MF-16N                | 1" Male NPT           |                 |                 |                    | 1" Female NPT   | 25.4(1.00) | 136(5.35)  | 102(4.02)  | -          | - | - |
|                             | SW-12P                | 3/4" Pipe Socket weld |                 |                 |                    | 22.4(0.88)      | 133(5.24)  | 88.9(3.50) | -          | -          | - |   |
|                             | SW-16P                | 1" Pipe Socket weld   |                 |                 |                    | 25.4(1.00)      | 136(5.35)  | 88.9(3.50) | -          | -          | - |   |
|                             | SW-12T                | 3/4" Tube Socket weld |                 |                 |                    | 22.4(0.88)      | 133(5.24)  | 82.6(3.25) | -          | -          | - |   |
|                             | SW-16T                | 1" Tube Socket weld   |                 |                 |                    | 22.4(0.88)      | 133(5.24)  | 82.6(3.25) | -          | -          | - |   |
|                             | SW-14M                | 14mm Tube Socket weld |                 |                 |                    | 22.4(0.88)      | 133(5.24)  | 95.3(3.75) | -          | -          | - |   |
|                             | SW-16M                | 16mm Tube Socket weld |                 |                 |                    | 22.4(0.88)      | 133(5.24)  | 88.9(3.50) | -          | -          | - |   |
|                             | SW-18M                | 18mm Tube Socket weld |                 |                 |                    | 22.4(0.88)      | 133(5.24)  | 82.6(3.25) | -          | -          | - |   |
|                             | SW-25M                | 25mm Tube Socket weld |                 |                 |                    | 22.4(0.88)      | 133(5.24)  | 82.6(3.25) | -          | -          | - |   |

All dimensions shown are for reference only and are subject to change. Dimensions with DK-Lok nuts are in finger-tight position.

**Flow Data @ 100°F(38°C)**

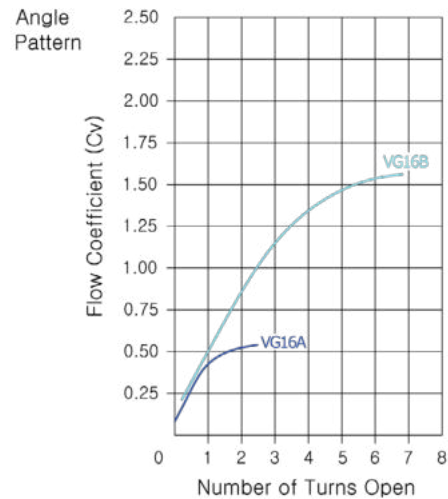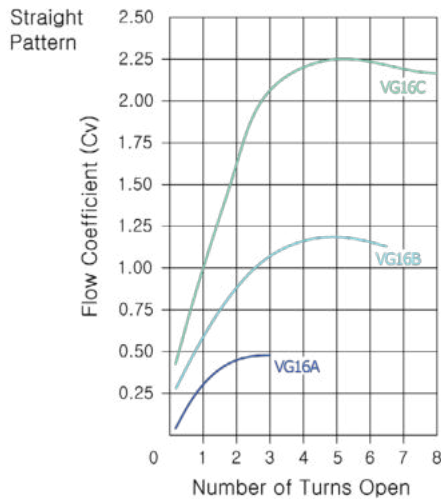

**Option & Accessories**

- Antitamper Handle**  
 Stainless steel bar handle is standard. Optional antitamper handle is available. To order valve with factory-assembled optional antitamper handle, insert designator -AT in the ordering number. To order handle for field assembly, select desired handle ordering number from the table ("How to order").
- Antitamper Key**  
 The key can be operated with the antitamper handle. Order separately. Ordering NO. G16-KEY-AT-SA.



**Factory Test and Cleaning**

Every valve is tested with the nitrogen gas @ 1,000 psig (68.9 bar) for leakage at the seat to a maximum allowable leak rate of 0.1 SCCM. The packing is tested for no detectable leakage. Optional hydrostatic shell test with additional cost is performed with pure water at 1.5 times the working pressure. Every valve is cleaned and packaged in accordance with DK-Lok cleaning standard DC-01.

**Sour Gas Service**

Valves for use in sour gas are available. Valve wetted components are selected to the requirements of NACE MR0175 for sulfide stress cracking resistant materials. To order, insert -SG in the basic ordering number.

**How to order**

VG16A-MF4N-

| -A                         | -GF                         | -AT   | -S                            |
|----------------------------|-----------------------------|---|-------------------------------|
| Valve Pattern Designator   | Packing Material Designator | Option Designator   | Valve Material Designator     |
| Nil : In-line<br>A : Angle | Nil : PTFE<br>GF : Graphite | Nil : Stainless Steel formed handle<br>AT : Antitamper handle | S : SS316<br>C : Carbon Steel |

**Safe Valve Selection**

The selection of a valve for any application or system design must be considered to ensure safe performance. Valve function, valve rating, material compatibility, proper installation, operation and maintenance remain the sole responsibility of the system designer and the user. DK-Lok accepts no liability for any improper selection, installation, operation or maintenance.



경상남도 김해시 주촌면 골든루트로 129번길 7 50969

7, Golden root-ro 129beon-gil, Juchon-myeon, Gimhae-si, Gyeongsangnam-do, South Korea. 50969

Tel. +82-55-338-0114 Fax. +82-55-901-0141 [www.dklok.com](http://www.dklok.com)

---

**VDK-LOK**

**VS13 Series**

Rev. 01-01  
Aug. 2023


### Features

- Compact and sturdy design
- Preventing influx of contaminants when operating the valve is protected by applying the handle
- The size of the orifice provided 0.145 in. (3.7 mm) and 0.216 in. (5.5 mm).
- DK-Lok Tube Fitting, male NPT, female NPT, and others are available.

Improving the flow control function in a suitably adjustment the vertical movement of the stem

No adjustment is needed in this O-ring stem seals


Provide a non-rotating stem repeatedly blocking



Extends the life of the screw to not expose the system fluid to open and close the thread

Securely seal the stem head backs contacts in the fully open state

Easy maintenance and possible replacement of the stem tip

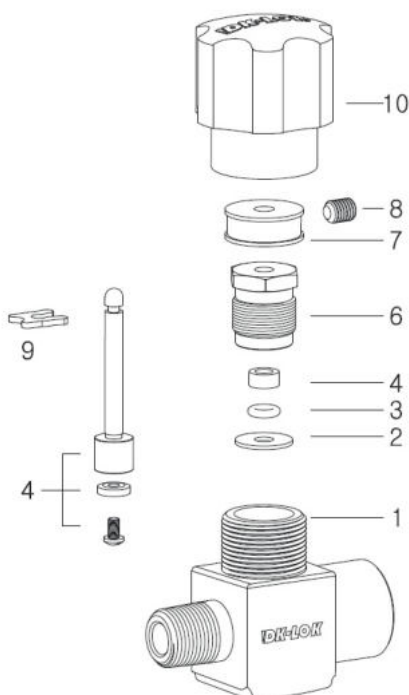

### Material of Construction

| Component                    | Wetted parts are listed in blue.        |                           |                          |
|------------------------------|---|---------------------------|--------------------------|
|                              | SS316                                   | Alloy400                  | Brass                    |
| Material Grade/ASTM Standard |   |                           |                          |
| 1. Body                      | SS316/A182                              | Alloy400/B564             | Brass C377/B283          |
| 2. Washer                    | PTFE coated SS316/A276                  | PTFE coated Alloy400/B164 | Mo coated Brass C360/B16 |
| 3. O-ring                    | FKM                                     |                           |                          |
| 4. Back-up ring              | PTFE/D1710                              |                           |                          |
| 5. Stem                      | SS316/A276                              | Alloy400/B164             | SS316/A276               |
| Stem tip                     | PCTFE/D1430                             |                           |                          |
| Screw                        | SS316/A276                              | Alloy400/B164             | SS316/A276               |
| 6. Packing bolt              | Mo coated SS316/A276                    | Mo coated Alloy400/B164   | Mo coated Brass C360/B16 |
| 7. Handle spool              | Aluminum 6061/B211                      |                           |                          |
| 8. Set screw                 | Stainless Steel 304                     |                           |                          |
| 9. Retainer                  | Zinc plated steel                       |                           |                          |
| 10. Handle                   | Aluminum 6061/B211 with black anodizing |                           |                          |

Wetted parts are listed in blue.



Apply only the proper torque to require a shutoff in order to prevent leakage, maintaining the proper performance, and increase the lifetime of the valve.


### Pressure-Temperature Ratings

| ASME Class          | 1250                        |           | 1500      |           | N/A       |            |
|---------------------|-----------------------------|-----------|-----------|-----------|-----------|------------|
| Material Group      | 2.2                         |           | 3.4       |           | N/A       |            |
| Material Name       | SS316                       |           | Alloy 400 |           | Brass     |            |
| Stem tip Material   | PCTFE                       | PEEK      | PCTFE     | PEEK      | PCTFE     | PEEK       |
| Temperature, °F(°C) | Working Pressure, psig(bar) |           |           |           |           |            |
| -20(-28) to 100(38) | 3000(207)                   | 3000(207) | 3000(207) | 3000(207) | 3000(207) | 3000(207)  |
| 150(65)             | 2790(192)                   | 2790(192) | 2815(194) | 2815(194) | 2675(184) | 2675(184)  |
| 200(93)             | 2580(178)                   | 2580(178) | 2630(181) | 2630(181) | 2350(162) | 2350(162)  |
| 250(121)            | -                           | 2455(169) | -         | 2540(175) | -         | 2200(152)  |
| 300(149)            | -                           | 2330(160) | -         | 2450(169) | -         | 2050(141)  |
| 350(177)            | -                           | 2236(154) | -         | 2408(166) | -         | 1220(84.1) |
| 400(204)            | -                           | 2141(148) | -         | 2365(163) | -         | 390(26.9)  |
| 450(232)            | -                           | 2067(143) | -         | 2365(163) | -         | -          |

• Buna N, EPDM, and silicon O-ring is max. 250°F(121°C).

• Buna C O-ring is -65°F(-53°C) to 250°F(121°C)

### Flow Data @ 100°F(38°C)

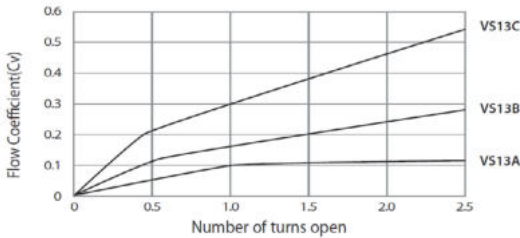


### Factory Test and Cleaning

Every valve is tested with the nitrogen gas @ 1,000 psig (68.9 bar) for leakage at the seat to a maximum allowable leak rate of 0.1SCCM.

The packing is tested for no detectable leakage. Optional hydrostatic shell test with additional cost is performed with pure water at 1.5 times the working pressure.

Every valve is cleaned and packaged in accordance with DK-Lok cleaning standard DC-01.

### Ordering Information and Table of Dimensions

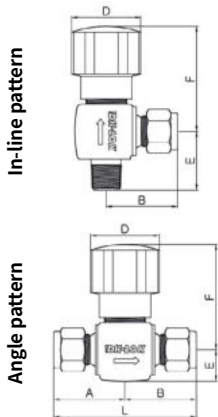

| Valve Basic Ordering Number | End Connections |                 | Orifice, mm(in.) | Cv         | Dimensions, mm(in.) |            |            |            |            |            |            |            |
|-----------------------------|-----------------|-----------------|------------------|------------|---------------------|------------|------------|------------|------------|------------|------------|------------|
|                             | Inlet           | Outlet          |                  |            | A                   | B          | D          | E          | F          | L          |            |            |
| VS13A-                      | D2T             | 1/8" DK-Lok     | 1/8" DK-Lok      | 2.4(0.093) | 0.12                | 27.9(1.10) | 28.5(1.12) | 8.50(0.33) | 48.5(1.91) | 55.8(2.20) |            |            |
|                             | D4T             | 1/4" DK-Lok     | 1/4" DK-Lok      |            |                     | 28.7(1.13) |            |            |            | 57.4(2.26) |            |            |
|                             | D6M             | 6mm DK-Lok      | 6mm DK-Lok       |            |                     | 28.7(1.13) |            |            |            | 57.4(2.26) |            |            |
| VS13B-                      | M4N             | 1/4" Male NPT   | 1/4" Male NPT    | 3.7(0.145) | 0.27                | 25.0(0.98) | 28.7(1.13) | 28.5(1.12) | 10.6(0.42) | 48.5(1.91) | 50.0(1.97) |            |
|                             | MD4N4T          | 1/4" Male NPT   | 1/4" DK-Lok      |            |                     | 25.0(0.98) | 28.7(1.13) |            |            |            | 53.7(2.11) |            |
|                             | MD4N6M          | 1/4" Male NPT   | 6mm DK-Lok       |            |                     | 25.0(0.98) | 28.7(1.13) |            |            |            | 53.7(2.11) |            |
| VS13C-                      | D6T             | 3/8" DK-Lok     | 3/8" DK-Lok      | 5.5(0.217) | 0.53                | 32.8(1.29) | 31.8(1.25) | 14.5(0.57) | 51.9(2.04) | 56.8(2.24) | 65.6(2.58) |            |
|                             | F4N             | 1/4" Female NPT | 1/4" Female NPT  |            |                     | 27.8(1.09) |            |            |            |            | 55.6(2.18) |            |
|                             | M6N             | 3/8" Male NPT   | 3/8" Male NPT    |            |                     | 28.4(1.12) |            |            |            |            | 32.8(1.29) | 61.2(2.41) |
|                             | MD4N6T          | 1/4" Male NPT   | 3/8" DK-Lok      |            |                     | 28.4(1.12) |            |            |            |            | 27.8(1.09) | 56.2(2.21) |
|                             | MF8N4N          | 1/2" Male NPT   | 1/4" Female NPT  |            |                     | 28.4(1.12) |            |            |            |            | 27.8(1.09) |            |
|                             |                 |                 |                  |            |                     |            |            |            |            |            |            |            |

All dimensions shown are for reference only and are subject to change. Dimensions with DK-Lok nuts are in finger-tight position.

### Option



Rupture disc prevent overpressure of sample cylinder or other pot by ejecting the cylinder fluid to atmosphere.

| Ordering Number | Nominal Burst Pressure at 70°F(20°C)       |
|-----------------|--|
| RD1             | 2850 psig ± 150 psig<br>196 bar ± 10.3 bar |
| RD2             | 1900 psig ± 100 psig<br>130 bar ± 6.8 bar  |

### Sour Gas Valves

Valves for use in sour gas are available. Valve wetted components are selected to the requirements of NACE MR0175 for sulfide stress cracking resistant materials. To order, insert -SG in the basic ordering number.

### How to order

VS13B-MF4N-

| -A                        | -PK                          | -BC  | -RD1                               | -S                                      |
|---------------------------|------------------------------|--|------------------------------------|---|
| Valve Pattern Designator  | Stem tip Material Designator | O-ring Material Designator                                       | Rupture Disc Designator            | Valve Material Designator               |
| Nil : Inline<br>A : Angle | Nil : PCTFE<br>PA : PEEK     | Nil : FKM<br>BC : Buna C<br>N : NBR<br>EP : EPDM<br>SI : Silicon | RD1 : 2850 psig<br>RD2 : 1900 psig | S : SS316<br>M : Alloy 400<br>B : Brass |

### Safe Valve Selection

The selection of a valve for any application or system design must be considered to ensure safe performance. Valve function, valve rating, material compatibility, proper installation, operation and maintenance remain the sole responsibility of the system designer and the user. DK-Lok accepts no liability for any improper selection, installation, operation or maintenance.



경상남도 김해시 주촌면 골든루트로 129번길 7 50969

7, Golden root-ro 129beon-gil, Juchon-myeon, Gimhae-si, Gyeongsangnam-do, South Korea. 50969

Tel. +82-55-338-0114 Fax. +82-55-901-0141 [www.dklok.com](http://www.dklok.com)

---